

Data Sheet for Joysticks

Synthesis of Joystick and Trackball

SpaceMouse® Module



- Intuitive control of 3D-movements
- 6 degrees of freedom
- Optoelectronic sensors
- UART or USB interface

The high-precision SpaceMouse® Module is ideally suited for 3D manipulation of industrial applications. Due to its compact dimensions the module can be easily integrated into panels, armrests, desktop housings, and many more. While signals of the UART version can be individually interpreted to application needs, the USB version is recognized by the operating system as a standard joystick. Core of the module is an opto-electronic sensor from 3dconnexion, which is proving itself a million times worldwide inside 3D-mice.

Technical Data	UART Interface (art.-nr. 131034)	USB Interface (art.-nr. 131002)
Electrical		
Sensor	Optoelectronic	Optoelectronic
Digital Resolution	10 bit	10 bit
Resolution Translation	250 Increments / mm	250 Increments / mm
Resolution Rotation	170 Increments / degree	170 Increments / degree
Data Rate	Max. 100 / s	Max. 100 / s
Supply Voltage	+3.3 bis +5.5 Volt	5 Volt ±10%
Current Consumption	Max. 10mA	Max. 20mA
Physical		
Height	52,2 mm	52,2 mm
Max. Ø Cap	53,8 mm	53,8 mm
Weight	60 g	60 g
Ø Installation Cut-Out	40,2 mm	40,2 mm
Thickness of Panel	1..5,5 mm	1..5,5 mm
Installation Depth	15 mm	15 mm
Vertical Actuation Force	11,0 N	11,0 N
Horizontal Actuation Force	7,4 N	7,4 N
Torque	171 Nmm	171 Nmm
Vertical Displacement	1,5 mm	1,5 mm
Horizontal Displacement	1,5 mm	1,5 mm
Twist & Tilt Angle (cw & ccw)	6°	6°
Cable Length	200 mm ±10mm	1500 mm ±50mm
Environmental Conditions		
Operating Temperature	0°..+50°C	0°..+50°C
Storage Temperature	-30°..+70°C	-30°..+70°C
Humidity (operating at T≤40°C)	Min. 10% - Max. 85% (non condensing)	Min. 10% - Max. 85% (non condensing)
Humidity (storage at T≤40°C)	Min. 10% - Max. 95% (non condensing)	Min. 10% - Max. 95% (non condensing)
Protection Class	IP54	IP54
EMI	EN61000-4-3 (10V,10V/m)	EN61000-4-3 (10V,10V/m)
ESD	EN61000-4-2 / Level 4	EN61000-4-2 / Level 4

Data Sheet for Joysticks

Synthesis of Joystick and Trackball

SpaceMouse® Module

Table of Contents

1	PRODUCT DESCRIPTION	3
1.1	USAGE NOTES	3
1.2	COMPONENTS	4
1.3	DEFAULT AXIS ORIENTATION	4
2	TESTS	5
2.1	DEGREES OF PROTECTION	5
2.2	TOLERANCE & RELIABILITY	6
2.3	LIFE TEST	6
4	TECHNICAL DRAWING	7
3.1	CASE OUTLINE UART	7
3.2	CASE OUTLINE USB	8
3.3	MOUNTING HOLE	9
5	INTERFACE SPECIFICATION UART	10
5.1	ELECTRICAL	10
5.2	PROTOCOL	11
6	INTERFACE SPECIFICATION USB	13
6.1	ELECTRICAL & PROTOCOL	13

1 PRODUCT DESCRIPTION

1.1 USAGE NOTES

The controller cap mounted on the measuring system can be moved in 6 degrees of freedom: Horizontal shift in x-direction and z-direction, vertical shift in y-direction, rotational tilt around x-axis and z-axis, plus twist around y-axis. Manipulation in several axes can be done simultaneously. For definition of axis orientation, please refer to chapter 1.3 „DEFAULT AXIS ORIENTATION“.



The SpaceMouse® Module **UART** communicates via serial interface (UART = Universal Asynchronous Receiver Transmitter). The signal levels are 0 Volt (logic 0) or VCC (logic 1), hence they are not RS232 compliant. For further details, please refer to chapter 5 „UART INTERFACE SPECIFICATION“.

The SpaceMouse® Module **USB** is recognized by the operating system as a standard joystick with 6 axes. The USB protocol follows the HID spec rev. 1.11, so no additional driver is needed.


The following operating systems are supported:

- Windows 8
- Windows 7
- Windows Vista
- Windows XP SP2
- Linux with USB host support
- Other systems supporting USB joysticks


For further details, please refer to chapter 6 „USB INTERFACE SPECIFICATION“.

1 PRODUCT DESCRIPTION

1.2 COMPONENTS (shown for UART Module)

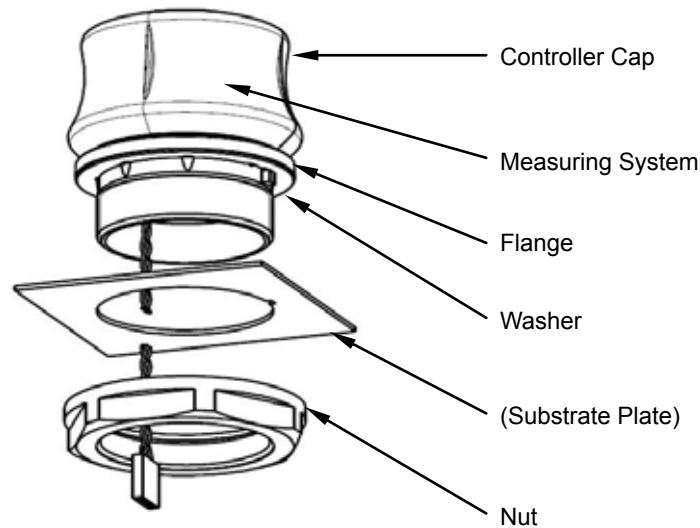

1.3 DEFAULT AXIS ORIENTATION

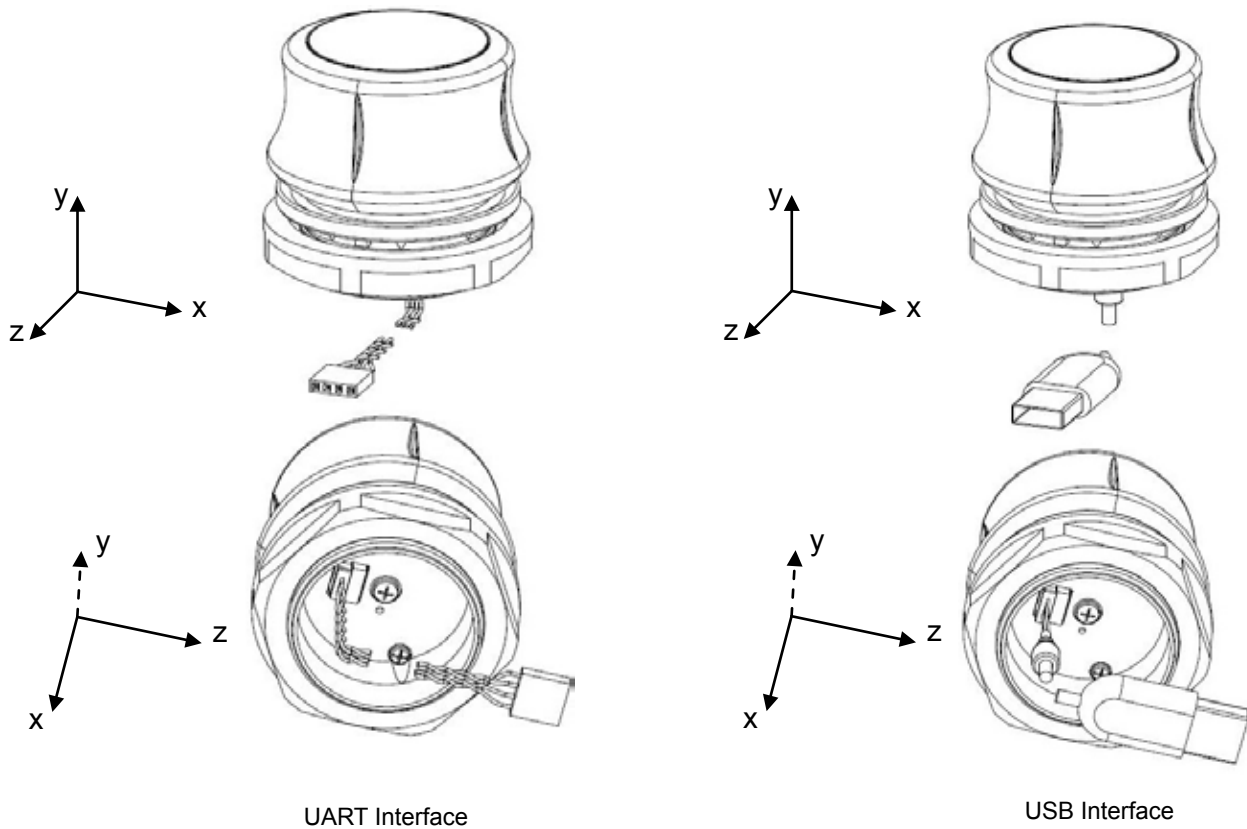

Data Sheet for Joysticks

Synthesis of Joystick and Trackball

SpaceMouse® Module

2 Tests

All tests and measurements were conducted under the following conditions unless otherwise specified:

- Temperature: 23°C (73.4°F) ± 10°C (50°F)
- Humidity: 65% ± 20%RH
- Atmospheric Pressure: 86kPa (860mBar) ~ 106kPa (1060mBar)

2.1 DEGREES OF PROTECTION

2.1.1 Tightness

Protection Class at least IP54

Item	Test Conditions	Specifications
First Digit: 5 (Dust protected)	Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment; complete protection against contact	
Second Digit: 4 (Splashing Water)	Test duration: 5 min. Water volume: 10 l/min. Pressure: 80-100 kN/m ²	Water splashing against the enclosure from any direction shall have no harmful effect.

Mounting conditions must be regarded for achieving this protection class.

2.1.2 PWIS (paint-wetting impairment substances)

Cap with cosmetic treatment and complete SpaceMouse® Module were tested. No paint wetting impairment substances detected. (PWIS – free).

(German: LABS - frei: keine lackbenetzungstörende Substanzen)

Item	Test Conditions	Specifications
Blast Test	Test item is hanging free Indicating substrate: cleaned Al-sheet Gas medium: N2 Blast time: 30 s Paint: Duplicolor 1-0400	Blowing gas blast on test item. Indicating substrate is in discharged gas blast. After blast, indicating substrate is covered with paint. No crater or impurity on painted sheet are accepted.

2.1.3 Fire Protection

For plastic parts (Cap, Insert, Flange): Fire protection classification UL94: at least V1

Data Sheet for Joysticks

Synthesis of Joystick and Trackball

SpaceMouse® Module

2 Tests

2.2 TOLERANCE AND RELIABILITY


Item	Test Conditions	Specifications
Controller Cap lifetime	(1) Operating speed: 2-3 times/s (2) Force applied at center of cap-side: 7.4N ± 0.9N (740gf ±90gf)	Number of actuations: 1,000,000 times No functional defects for the cap actuation
Drop test (only for reference)	(1) Height: 100cm (2) Floor surface: Steel or concrete (3) Direction: 5 faces, except cable face (4) Number of drops: 5 (one drop per face)	No cracks or breakage (excl. cosmetic scratches). No functional defects for the buttons and Controller Cap actuation. Pop out of buttons and cap-insert is accepted when they can be pushed in again without impact to function

2.3 LIFE TEST

Item	Test Conditions	Specifications
Burn-In Test	Expose device 24hrs to a temperature of 45°C	No functional defects, no cosmetic degeneration
Mean Time Between Failure	30 EA for 84 day burn-in at 45°C (can differ depending on the available resources at test lab.)	Confidence Level 80% MTBF = 150.000 hours

3 Technical Drawing


3.1 CASE OUTLINE - UART Interface

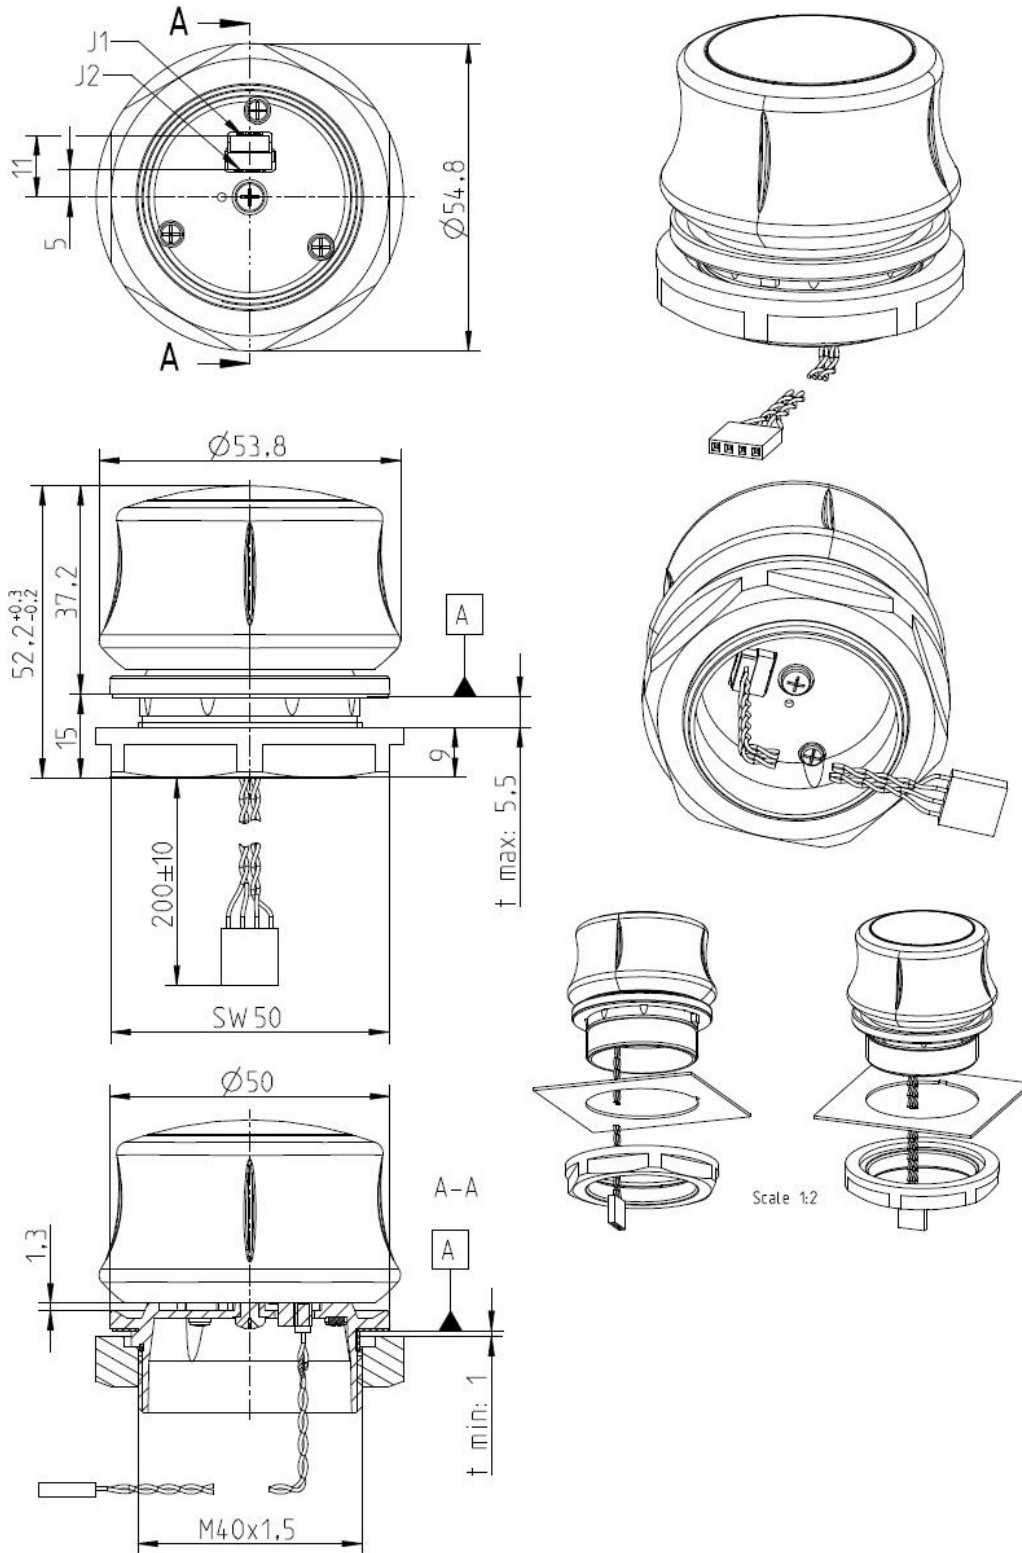

All dimensions in mm

3 Technical Drawing


3.2 CASE OUTLINE - USB Interface

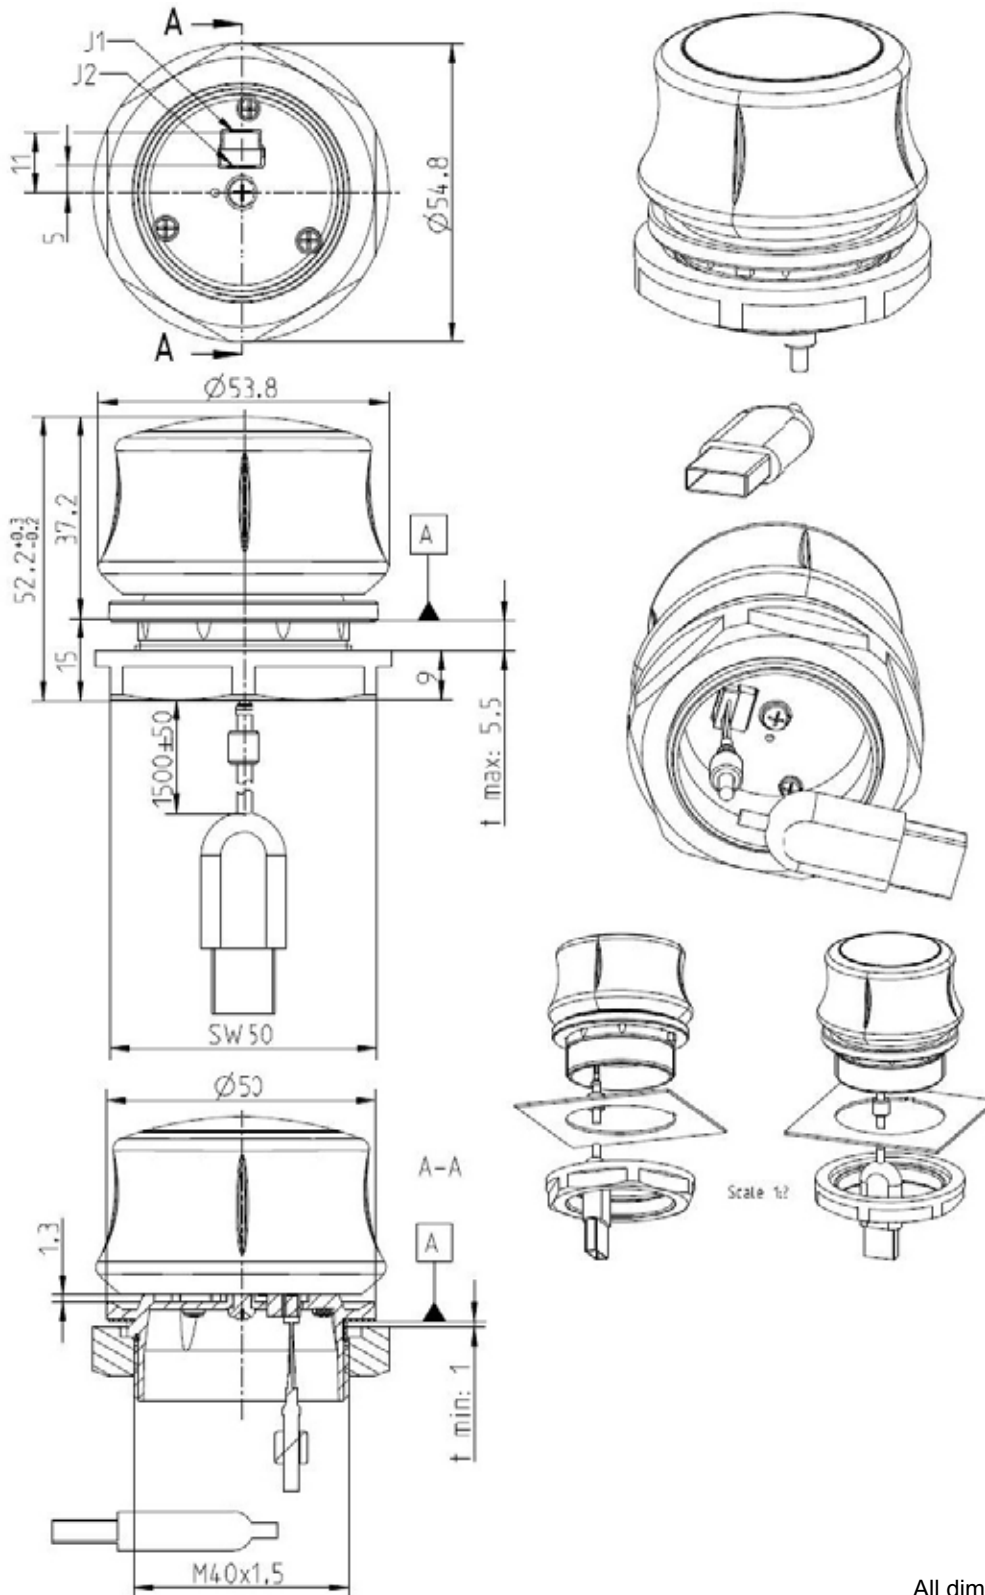

All dimensions in mm

3 Technical Drawing

3.3 MOUNTING HOLE

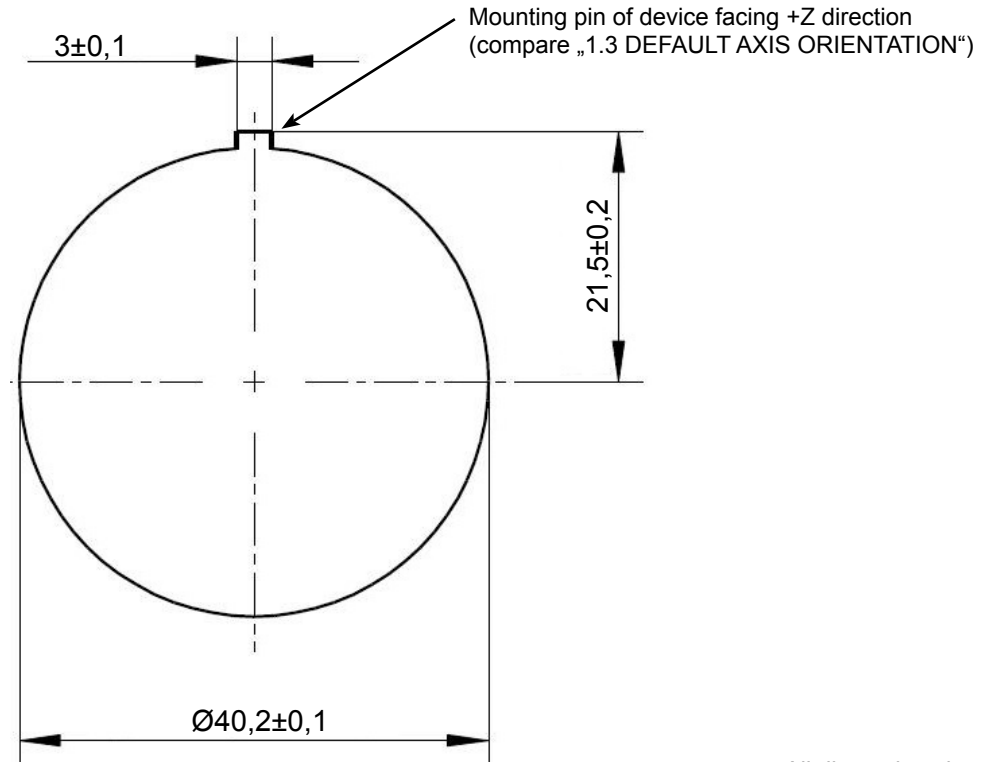

All dimensions in mm

SpaceMouse®Module UART Interface
Article number 131034



4-pin connector J1

SpaceMouse®Module USB Interface
Article number 131002



5-pin connector J1

5 UART INTERFACE SPECIFICATION

5.1 ELECTRICAL

5.1.1 Data interface (UART) settings

The device communicates via serial interface (UART = Universal Asynchronous Receiver Transmitter). The signal levels are 0 Volt (logic 0) or VCC (logic 1), hence they are not RS232 compliant.

UART settings

Baud rate	38400
Data bits	8
Parity	none
Stop bits	1
Data rate	max. 100 / s

5.1.2 4-Pin Connector J1

The UART Module has a 4-pin male connector with 1,0mm grid pattern.
 Cable connector: JST SHR-04V-S-B with crimp contact SSH-003T-P0.2
 Connector on the module: JST BM04B-SRSS-TB

Pin	Function	Wire Color
1	VCC +3.3V to +5.0V	red
2	TxD (output)	green
3	RxD (input)	orange
4	GND	black

5.1.3 Cable

For connector to UART Module, please refer to chapter 5.1.2 „4 Pin Connector J1“

The connection to a console is achieved by a 4-pin female connector with 2.54mm grid pattern.

Pin	Function	Wire Color
1	VCC +3.3V to +5.0V	red
2	GND	black
3	TxD (output)	green
4	RxD (input)	orange

5 UART INTERFACE SPECIFICATION

5.2 PROTOCOL

The UART Module listens to the following commands:

Function	Command	Answer
Data request command	REQUEST_DATA	0xAC
Zero command	SET_ZERO_POSITION	0xAD
Start auto-data	AUTO_DATA_ON	0xAE
Stop auto-data	AUTO_DATA_OFF	0xAF

5.2.1 Command structure

All commands are single byte commands with MSB set to logic 1.

Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
1	X	X	X	X	X	X	X

Each command is acknowledged by a response, each response of the 3D-Sensor is terminated by an end-byte 0x8D (MSB is set).

5.2.2 UART commands

SET_ZERO_POSITION

Function: sets the current position of the device as zero-position

Command: 173 (0xAD)

Returns: 0xAD 0x8D

During power-up of the device, the current position of the device is also set as the zero-position.

AUTO_DATA_ON

Function: starts automatic transmission of data (30ms intervals)

Command: 174 (0xAE)

Returns: 0xAE 0x8D

AUTO_DATA_OFF

Function: stops automatic transmission of data

Command: 175 (0xAF)

Returns: 0xAF 0x8D

REQUEST_DATA

Function: requests position data from the 3D-Sensor

Command: 172 (0xAC)

Returns: 16 bytes data

Structure: B1 B2 ... B16

5 UART INTERFACE SPECIFICATION

Byte 1: start-byte 0x96 (150 decimal); every data set starts with this byte
Byte 2: high byte of X value
Byte 3: low byte of X value
Byte 4: high byte of Y value
Byte 5: low byte of Y value
Byte 6: high byte of Z value
Byte 7: low byte of Z value
Byte 8: high byte of A value
Byte 9: low byte of A value
Byte 10: high byte of B value
Byte 11: low byte of B value
Byte 12: high byte of C value
Byte 13: low byte of C value
Byte 14: high byte of Checksum
Byte 15: low byte of Checksum
Byte 16: end-byte 0x8D; every response ends with this byte

X, Y, Z, A, B, C values and the Checksum are transmitted as unsigned 14-Bit values. This is due to the fact, that the MSB of payload data is always cleared (logic 0).

Calculating a value:

high byte (X) low byte (X)

14-bit value (unsigned)

$$Xvalue = (high\ byte\ (X) * 128 + low\ byte\ (X)) - 8192$$

Transmitted Checksum:

$$Checksumtrans = (high\ byte\ (Checksumtrans) * 128 + low\ byte\ (Checksumtrans))$$

Calculating the Checksum:

$$Checksumcalc = (Byte1 + Byte2 + \dots + Byte13) \& 0x3FFF.$$

By masking the Checksum with 0x3FFF (logic AND operation), the value is reduced to a 14-Bit value.

6 USB INTERFACE SPECIFICATION

6.1 ELECTRICAL & PROTOCOL

6.1.1 Data interface & Protocol

The SpaceMouse® Module USB is designed for USB 1.1 and 2.0. No additional power source is needed. The module acts like a standard USB joystick with 6 axes.

6.1.2 5-Pin Connector J1

The USB Module has a 5-pin male connector with 1,0mm grid pattern.
 Cable connector: JST SHR-05V-S-B with crimp contact SSH-003T-P0.2
 Connector on the module: JST BM05B-SRSS-TB


Pin	Function	Wire Color
1	Shield	black
2	GND	black
3	VCC +5.0V	red
4	D-	white
5	D+	green

6.1.3 Cable

For connector to USB Sensor Module, please refer to chapter chapter 6.1.2 „5-Pin Connector J1“.

Electrical	Min	Typ	Max
Supply voltage	4.4V	5.0V	5.25V
Supply current			60mA
Suspend current			0.5mA

Pin-out of USB connector

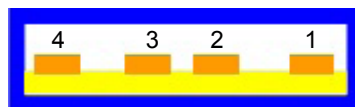

Pin-out of USB cable

USB Plug	Wire Color	Pin Assigned in PCB	Signal
1	red	3	VCC
2	white	4	D- (inversed DATA)
3	green	5	D+ (DATA)
4	black	2	GND
Shell	drain wire	1	Shield