



Solid mechanical construction
 Protection to IP 65, IP 66
 SMD technology
 Electronic preset
 Programmable



Absolut Manual Encoder MEA 70 Interbus

Manual pulse generator with magnetic click-stop with programmable Absolute Encoder, Single-turn or Multi-turn

Resolution

Resolution (Steps/360°):

4096 = 12 bit 8192 = 13 bit

Measuring range

Measuring range

Single-Turn	1 Umdrehung
Multi-Turn	4096 Umdrehungen = 12 bit

Type explanation

MEA70 /EAM5824-B-30-IBS

Encoder type	Absolute
Case diameter	ø 58 mm
Number of bits	12 = 12 bits x 1 turn 13 = 13 bits x 1 turn 24 = 12 bits x 4096 turns 25 = 13 bits x 4096 turns
Single-turn	Yes
Multi-turn	Yes
Supply voltage	30 = 10..30 VDC
Interface	IBS = Interbus

Technical data

Mechanical data

Graduation	1 - 100
Torque	5 .. 20 Ncm
shaft loading	? 50 N radial ? 20 N axial
Operational life of ball bearings	> 6 x 10 ⁹ revolutions
Weight	? 1,3 kg

Environmental conditions

Vibration	100 m/s ² (10 ... 1000 Hz)
Shock	300 m/s ² (11 ms)
Operating temperature	-0 ... +60°C
Storage temperature	-40 ... +85°C
Atmospheric humidity	? 98% r.h.
Protection class	IP 65 (DIN 40050/IEC 144) IP 66 (optional)

Electrical data


Scanning type	Optical, without contact
Transmitter, infrared	LED
Receiver	Photo-Array
Scanning frequency LSB	800 kHz LED
Measurement accuracy	±½ LSB (12 bit) ±1 LSB (13 bit)
Supply voltage	V _{cc} = 10...30 VDC
Power consumption	? 150 mA (V _{cc} = 24 V)

Electrical connections

Interbus

Interface	RS485 with optocoupler
Clock	max. 500 kBaud or 2 MBaud

Outline drawing

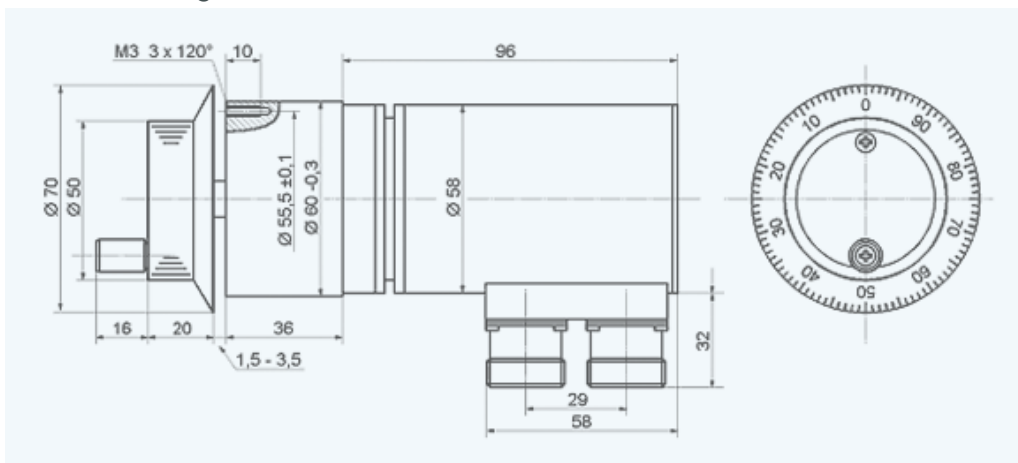

Version MA 403-611 · Subject to change

