


Ride Control®

Standard bogie for various applications

- Constant damped bogie
- Predecessor to Super Service Ride Control®
- Smaller wide-winged friction shoe provides good stability
- Widely accepted end truck for articulated intermodal equipment
- Up to 286,000 pound Gross Rail Load/
32.5 tonne Axle Load

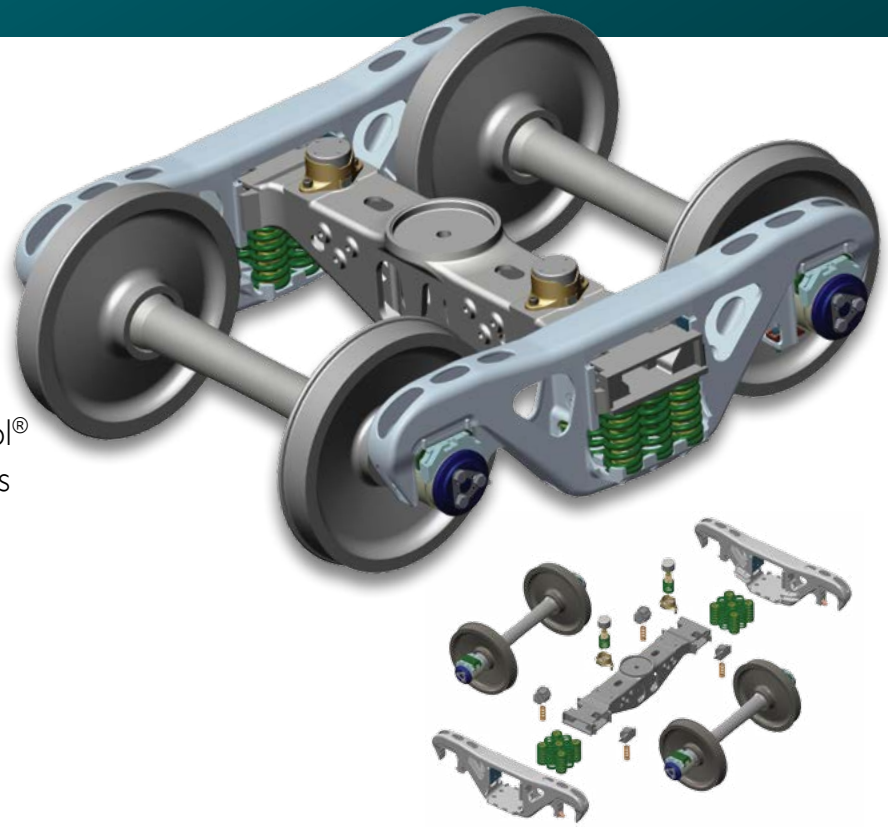


RIDE CONTROL COMMON CONFIGURATIONS

Designation	Track Gauge	Journal Size	Axle Load	Wheel Diameter	Wheel Base	Center Bowl	Spring Type	Additional Description
AR-5000	1067mm	5 ½ X 10	20t	762mm 30"	1575mm 62"	305mm 12"	AAR	-
AR-3398	1435mm	6 ½ X 12	32.5t	914mm 36"	1778mm 70"	406mm 16"	AAR	-
AR-761	1435mm	6 X 11	25t	840mm 33"	1727mm 68"	356mm 14"	AAR	AR-1 STEERING ARMS

A world apart in reliability **Amsted Rail®**

**Amsted Rail, the global leader
in fully integrated freight car systems
for the heavy haul rail market.**

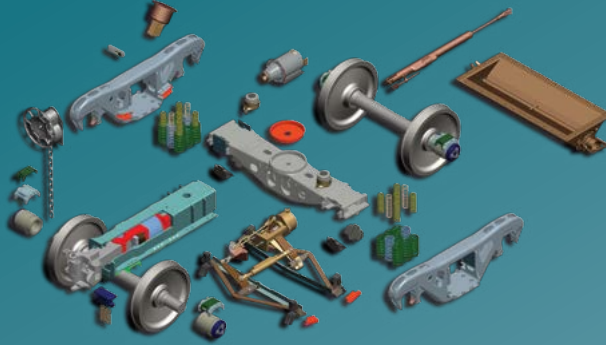

Amsted Rail has been an industry leader in freight railroading for more than 100 years. Our experience, dedication and efficiency in servicing today's demanding heavy haul operations is unequalled as we keep railcars rolling in some of the world's toughest railroad environments. To learn more, visit www.amstedrail.com.

A world apart in reliability **Amsted Rail**[®]