




Short description

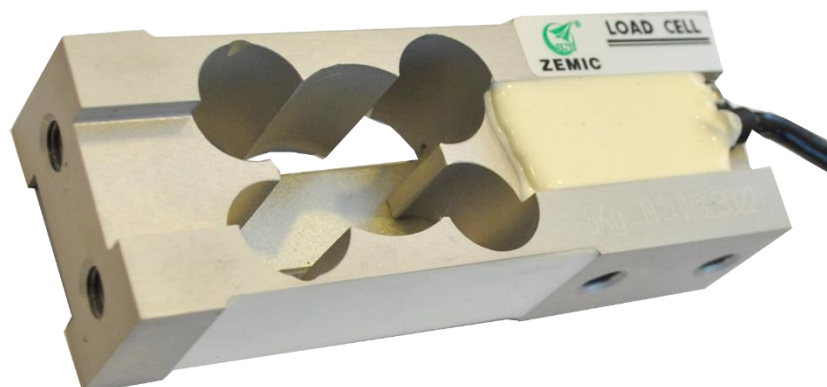

- Aluminium-alloy IP65 single point load cell.
- Colourless anodized
- Available with flat ribbon or PVC cable.
- Suitable for counting and other electronic scales
- Maximum platform size: 350 x 450 mm

Non-OIML approved

Available models

Capacity	Accuracy	Full article description
3kg	C3	L6C-C3-3kg-0.35P5/2B
5kg	C3	L6C-C3-5kg-0.35P5/2B
8kg	C3	L6C-C3-8kg-0.35P5/2B
20kg	C3	L6C-C3-20kg-0.35P5/2B
30kg	C3	L6C-C3-30kg-0.35P5/2B
50kg	C3	L6C-C3-50kg-0.35P5/2B

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

Zemic Europe B.V.
Leerlooierstraat 8
4871 EN Etten-Leur
The Netherlands

Nr. 2018.10 L6C Rev7

1/3

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl

Detailed specifications L6C

Accuracy class		C3
Output sensitivity (= FS)	mV/V	1.9 ± 0.2
Maximum capacity (E _{max})	kg	3, 5, 8, 20, 30, 50
Max.number of load cell intervals	n _{LC}	3000
Ratio of min. LC verification interval	$Y = E_{max} / v_{min}$	7000
Combined Error	%FS	≤± 0.0230
Minimum dead load	Of E _{max}	0%
Safe overload	of E _{max}	120 %
Ultimate overload	of E _{max}	150 %
Zero balance	of FS	< ± 2.0 %
Excitation, recommended voltage	V	5 ~ 15
Excitation maximum	V	18
Input resistance	Ω	406 ± 6
Output resistance	Ω	350 ± 3
Insulation resistance	MΩ	≥5000 (at 50VDC)
Compensated temperature	°C	-10 ~ +40
Operating temperature	°C	-35 ~ +65
Storage temperature	°C	-40 ~ +70
Element material		Aluminium
Ingress Protection (acc. to EN 60529)		IP65
Recommended torque on fixation	Nm	M8: 20
Corner error		0.02% load/ 100 mm

Wiring

Wiring:


Shielded, 4 conductor flat ribbon cable (0.35P5) or 4 conductor PVC cable (2B).

Cable dimensions: Flat ribbon: 1.7 x 8.5 mm or PVC: Ø 5.3 mm.


Standard cable length: 0.35m for flat ribbon and 2m for PVC cable.

Shield is connected to element.

4-wire diagram

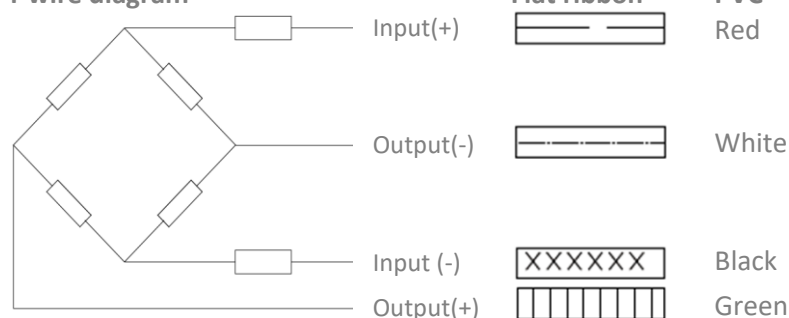

Specifications and dimensions are subject to change without notice and do not constitute any liability whatsoever.

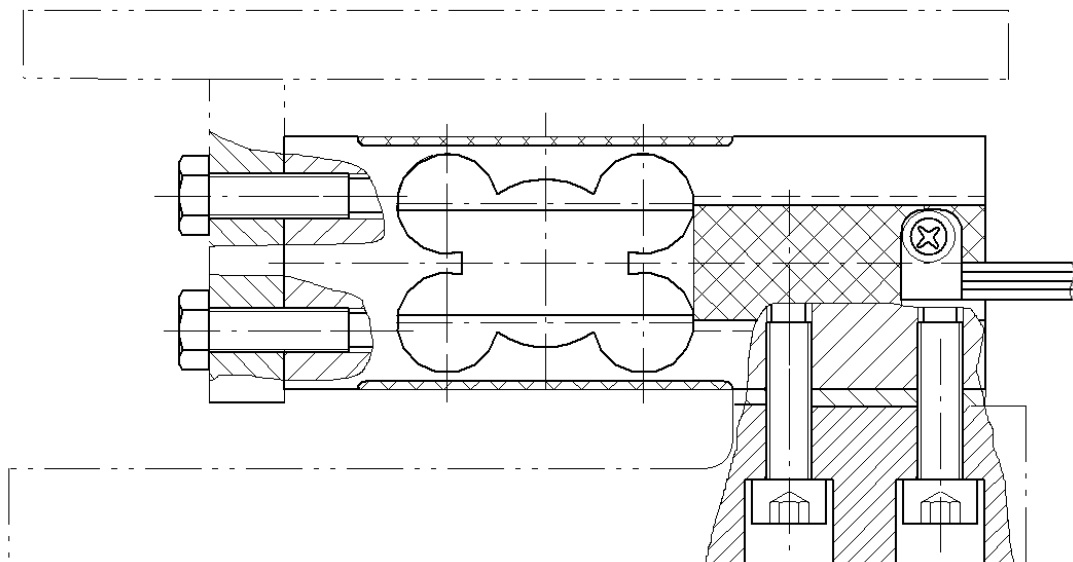

T: +31 76 50 39480
F: +31 76 50 39481
info@zemic.nl
www.zemic.nl