

**Variable area flow meter type 335**  
**Float in PVDF without magnet**  
**With solvent cement sockets PVC-U metric**  
**O-rings in EPDM**




**Model:**

- Standard guiding rod PVDF with stainless steel core (V4A) for DN50 and DN65

**Option:**

- 4-20 mA sensor
- Limit contacts
- Special scales for different media
- Union nuts and connecting parts in other materials on request

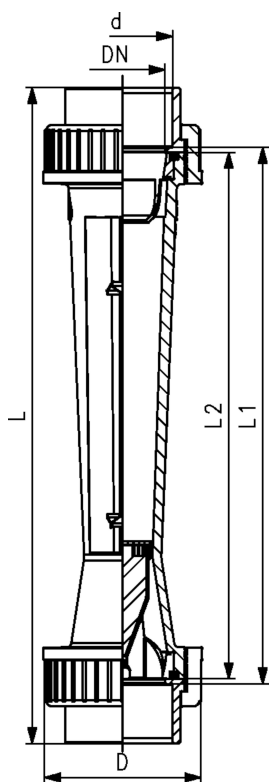

Scale range (L/h)	d (mm)	DN (mm)	Size (inch)	PVC-U transp. Code	Weight (kg)	Polyamid Code	Weight (kg)
50 - 500	32	25	1	199 335 000	0.564	199 335 020	0.522
100 - 1000	32	25	1	199 335 001	0.473	199 335 021	0.423
150 - 1500	40	32	1 ¼	199 335 002	0.626	199 335 022	0.567
250 - 2500	40	32	1 ¼	199 335 003	0.706	199 335 023	0.620
200 - 2000	50	40	1 ½	199 335 004	0.972	199 335 024	0.885
300 - 3000	50	40	1 ½	199 335 005	0.952	199 335 025	0.874
600 - 6000	50	40	1 ½	199 335 006	1.019	199 335 026	0.840
600 - 6000	63	50	2	199 335 007	1.357	199 335 027	1.381
1000 - 10000	63	50	2	199 335 008	1.299	199 335 028	1.196
1500 - 15000	63	50	2	199 335 009	1.301	199 335 029	1.355
2000 - 20000	75	65	2 ½	199 335 010	2.513	199 335 030	2.536
3000 - 30000	75	65	2 ½	199 335 011	2.442	199 335 031	2.286
8000 - 60000	75	65	2 ½	199 335 012	2.293	199 335 032	2.333

Scale range (L/h)	Polysulfone Code	Weight (kg)	D (mm)	L (mm)	L1 (mm)	L2 (mm)	G (inch)
50 - 500	199 335 040	0.464	58	385	341	335	1 ½
100 - 1000	199 335 041	0.528	58	385	341	335	1 ½
150 - 1500	199 335 042	0.698	72	393	341	335	2
250 - 2500	199 335 043	0.561	72	393	341	335	2
200 - 2000	199 335 044	1.057	83	403	341	335	2 ¼
300 - 3000	199 335 045	1.038	83	403	341	335	2 ¼
600 - 6000	199 335 046	0.991	83	403	341	335	2 ¼
600 - 6000	199 335 047	1.307	101	417	341	335	2 ¼
1000 - 10000	199 335 048	1.252	101	417	341	335	2 ¼
1500 - 15000	199 335 049	1.302	101	417	341	335	2 ¼
2000 - 20000	199 335 050	2.639	135	429	341	335	3 ½
3000 - 30000	199 335 051	2.572	135	429	341	335	3 ½
8000 - 60000	199 335 052	2.432	135	429	341	335	3 ½

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland  
 Phone +41 -(0)52-631 1111  
 e-mail: info.ps@georgfischer.com  
 Internet: http://www.gfps.com