




SLIP RING
SC020-COAX

COAXIAL SLIP RING FOR HD-VIDEO SIGNALS

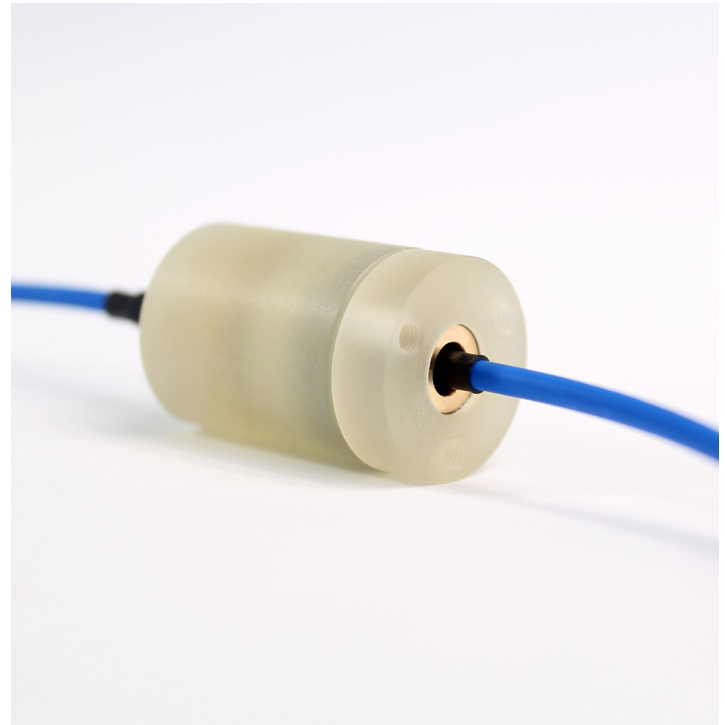


ELECTRICAL DATA

Number of rings:	2 rings for Coax 75 Ω
Voltage:	max. 24 V _{DC}
High pot:	500 V _{AC}
Insulation resistance:	1000 MΩ at 500 V _{DC}
Contacts / Leads:	gold-gold

MECHANICAL DATA

Speed:	max. 10 min ⁻¹
Protection class:	IP51
Temperature:	-20 °C ... +80 °C (-5 °F ... +175 °F)
Rotor/Stator conn.:	Enviroflex RG 179 length = 1500 mm
Bearings:	miniature ball bearings of steel
Housing:	with flange of Polycarbonate

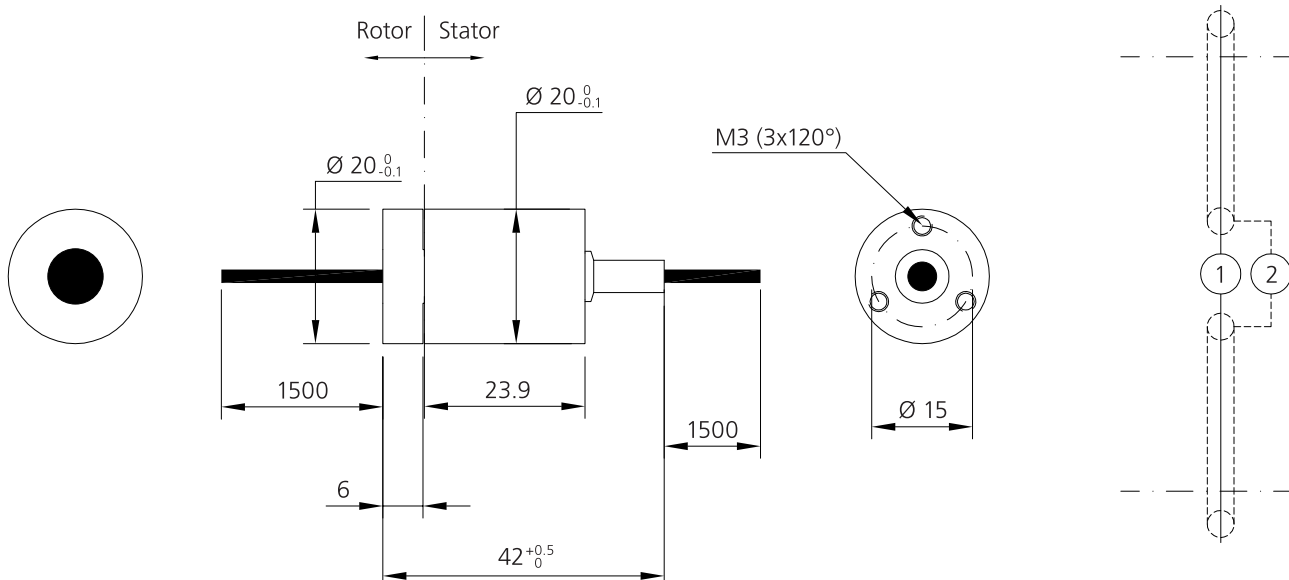



SLIP RING

SC020-COAX

LTN

LTN Servotechnik GmbH
Georg-Hardt-Straße 4
83624 Otterfing, Germany
Tel: +49 (0)8024 6080-0
Fax: +49 (0)8024 6080-1000
ltn@ltn.de
www.ltn.de

Subject to change without prior notice. Issued 11/2016