



FACTS

- 6, 12, 18 or 24 rings for max. 10 A
- 500 V_{AC} per ring
- Outer diameter 104 mm
- Hollow shaft diameter 50 mm
- Max. 400 min⁻¹

The system is maintenance free for up to 50 million rotations (depending on rotation speed and environmental conditions).



ELECTRICAL DATA

Number of rings: 6, 12, 18 or 24 Current: max. 10 A per ring

Voltage: $500 \text{ V} \sim \text{EN60664-1 (VDE0110)}$ Test Voltage: 1500 V_{AC} (60 Hz) between all rings

Insulation resistance: $1000 \text{ M}\Omega$ at 500 V_{DC} Noise: $20 \text{ m}\Omega$ at 5 min^{-1}

MECHANICAL DATA

Speed: max. 400 min⁻¹

Protection class: IP54


Temperature: -40 °C ... +80 °C (-40 °F ... +176 °F)

Connection: 1000 mm leads;

AWG 16 - leads (1.23 mm²) PVC

Bearings: precision steel ball bearings with seals

Housing: fibre-reinforced plastics

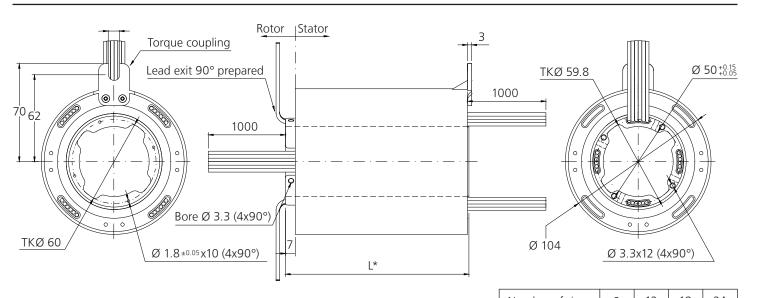





ACCESSORIES ON REQUEST

- Adapter for slip ring SC020
- Shaft bushing (Inner diameter: 1.5"/ 38.1 mm)
- * Extension by slip ring SC020 for additional channels, rotational speed max. 250 min⁻¹ (see data sheet SC020).



Combination with slip ring SC020*



Shaft bushing (smaller inner diameter)

VARIANTS



Combination 2 systems SC104



Cable led out one-sided



Torque arm shifted by 90°

The SC104 is a standard slip ring with exceptionally durable industrial bearings. With additional slots for axial cable routings, it can be applied modularly as combination of up to three 12-pole-systems with 36 rings max. The torque support can be placed at the front or back side of the housing and with flexibility of 90°. All models are equipped with 1 meter lead wires, lead exit optionally on one side of the housing - to turn them on 0°, 90°, 180° and 270°.

LTN Servotechnik GmbH

Georg-Hardt-Straße 4 83624 Otterfing, Germany Tel: +49 (0)8024 6080-0 Fax: +49 (0)8024 6080-1000

ltn@ltn.de www.ltn.de

Subject to change without prior notice. Issued 10/2016