MPSS151 US





**MULTI-PASSAGE SOFT-SEAL ROTATING UNIONS** 

## DEUBLIN Multi-Passage Soft-Seal Rotating Unions


A rotating union connects a stationary pressurized supply line to a rotating machine part such as a cylinder, roll, spindle, clutch, etc. It can be used to convey virtually any liquid or gas: steam for heating, water or water/glycol solutions for cooling, hydraulic fluids, cutting fluids, air, inert gas, or even vacuum. The task becomes more complicated when more than one media must be conveyed simultaneously. This is the role of a multi-passage union – to provide multiple, independent passages for the same or several different media to different rotating feed points within the same axis.

Typically, each passage is isolated from all other passages and different media are not allowed to mix. The key to reliable function of a multi-passage union thus lies in the sealing technology. Different seal types are dictated by the operating conditions – temperature, pressure, rotation speed, torque, medium chemistry and passage size.

Because each application is unique in terms of passage diameter, number of passages, flange configuration and operating conditions, Deublin brings to bear unparalleled engineering expertise and experience to match your operational needs. Whether a standard model can be applied or a custom solution is required, you can rely on Deublin for the optimal solution with long-term performance and reliability.

### TYPICAL APPLICATIONS FOR MULTI-PASSAGE UNIONS

- Steel industry: ladle turrets for continuous casting operations
- Plastics & rubber industries: injection and rotary molding operations
- Machining operations: workholding and clamping functions
- Aerospace manufacturing and flight simulators
- Industrial cranes
- Rail transportation
- De-scaling operations
  - ...and many more

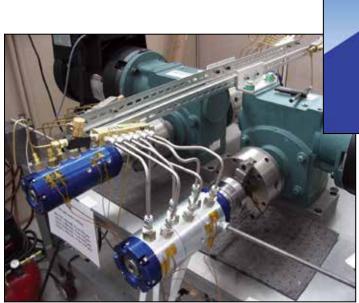

with Finite Element Analysis (FEA), and validated by extensive testing


Designed and engineered

Deublin Multi-Passage unions testing fixture

# DEUBLIN Multi-Passage Sealing Solutions

Deublin Multi-Passage Soft-Seal unions are optimized for the operating parameters of the application such as speed, torque, media pressure, operating temperature, physical size and other factors. Hardened chrome sealing surfaces are standard to ensure minimal wear and long service life.

- Plastomeric Seals a combination of plastic and elastomer – offer superior resistance to high temperatures and pressures compared to traditional elastomers. Seal geometry and treatment of the rotor mating surface are carefully matched to the media, rotational speed, and pressure of the specific application.
- Deublin's proprietary seal chemistry and geometry maximize performance including reduced friction and torque, and extended service life. This performance advantage alllows Deublin multipassage soft-seal unions to be used for a wide variety of applications.

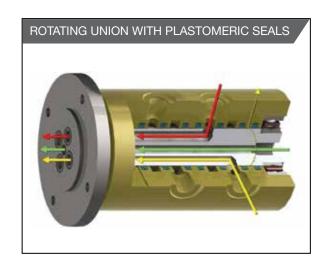



Typical commercial seal design: Inner pad may have different cross-sectional geometry depending on media and operating conditions.



**Deublin proprietary seal design:** Use a variety of materials and geometries depending on media and operating conditions.


### **DEUBLIN** Product Definition

Deublin Multi-Passage Soft-Seal rotating unions can be used in the widest variety of applications and media. Typical media includes the following:

- Hydraulic Oil
- Water
- Water-Glycol
- Air (dry/lubricated)
- Nitrogen

- Argon
- Grease
- Coolant
- Cutting Oil
- Vacuum

For media not listed above, please contact Deublin.

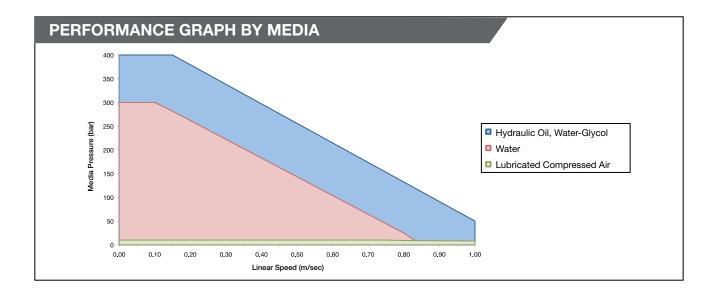

#### **TYPICAL MEDIA & OPERATING CONDITIONS**

Media	Pressure		Temperature		Speed
	bar	psi	°C	°F	
Hydraulic Oil	≤ 400	≤ 5,800	≤ 80	≤ 175	Maximum rotational speed is a function of media, pressure and rotor diameter (see above chart).  Note: Typical speeds ≤ 50 RPM
Water-Glycol	≤ 400	≤ 5,800			
Water	≤ 300	≤ 4,350			
Air (dry/lubricated)	≤ 12	≤ 175			
Nitrogen	≤ 12	≤ 175			
Argon	≤ 12	≤ 175			
Coolant	≤ 120	≤ 1,740			
For operating conditions exceeding above parameters, please contact Deublin.					

DEUBLIN unions should not be used to convey flammable media (flash point < 140° F or 00° O) as rearrange that y count in comprosed in accordance with standard safety guidelines for the media, and in a well-ventilated area. The use of our product on hazardous or corrosive media is strictly forbidden. DEUBLIN unions should not be used to convey flammable media (flash point  $\leq 140^\circ$ F or  $60^\circ$ C) as leakage may result in explosions or fires. DEUBLIN unions should be used

### **DEUBLIN** Product Definition

Deublin offers Multi-Passage Soft-Seal rotating unions that are standard, semi-custom and custom. When possible, Deublin recommends standard models, but will recommend semi-custom or custom models depending on the unique requirements of each application.

Semi-Custom unions can have different port sizes on the same union, SAE port connections and/or larger center bore (up to 50 mm).

Custom unions have no limitation on dimensions, port sizes, port connection specifications and center bore dimensions.

#### STANDARD FEATURES

Ports/Passages: 2 to 8

Sizes: 1/8" to 1/2", NPT or BSP


Materials of Construction:

Flanged rotor: AISI 420 with aluminum

housing

Bearings: dual, widely-spaced ball bearings ensure smooth running and minimize impact of potential side-loading

 Optional center bore up to 25 mm (1") for electrical slip ring wires

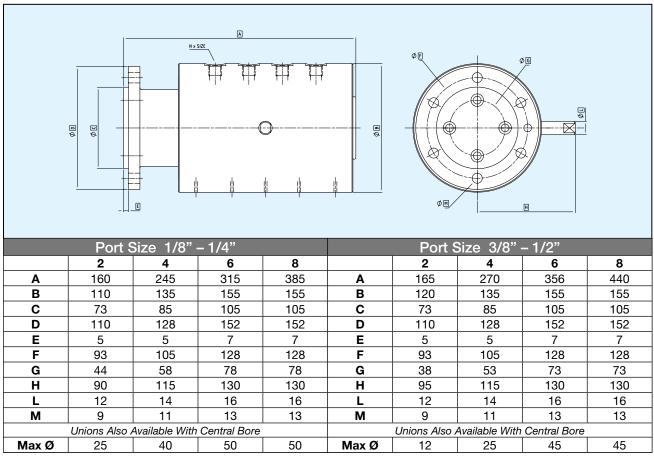

Note: all dimensions, except port sizes, in mm

### **Examples of Applications**

Deublin designs and manufactures a complete range of rotating unions from simple, single channel models used to prevent flex-hoses from twisting, to 12-port unions used on machine tool index tables, to massive, multi-channel unions used for ladle turrets in continuous casting machines. Deublin Multi-Passage Soft-Seal unions are used in applications that may require air, water, oil, grease, argon and other media.



**Application:** Machine Tool

Passages: 12





# **Examples of Applications**





**Application:** Steel Plant

Passages: 5 with large center bore



Multi-Passage Soft-Seal unions can be combined with Electrical Slip Rings





Since its establishment in 1945, **Deublin** has consistently adhered to a policy of producing the best product of its kind in the market. The result of this policy has been constant growth through the years. For this progress we are grateful to our many loyal customers. We cordially invite you to visit our modern manufacturing facilities in Waukegan, Illinois; Hofheim, Germany; Monteveglio, Italy; and Dalian, China.

Sincerely,

Donald L. Deubler Chairman of the Board







Dalian, China



Deublin products & services are available throughout the world.

www.deublin.com

#### **AMERICAS**

#### **DEUBLIN** USA

2050 Norman Drive

Waukegan, IL 60085-6747 U.S.A. Phone: +1 847 689-8600 Fax: +1 847 689-8690

e-mail: customerservice@deublin.com

#### **DEUBLIN** Brazil

Rua Fagundes de Oliveira, 538 - A11 - Piraporinha CEP: 09950-300 - Diadema - SP - Brazil

Phone: +55 11-2455-3245 Fax: +55 11-2455-2358

e-mail: deublinbrasil@deublinbrasil.com.br

#### **DEUBLIN** Canada

3090 Boul. Le Carrefour, Suite 505 Laval, Quebéc H7T 2J7 Canada Phone: +1 514 745-4100 Fax: +1 514 745-8612

e-mail: customerservice@deublin.com

#### **DEUBLIN** Mexico

Norte 79-A No. 77, Col. Claveria

02080 Mexico, D.F.

Phone: +52 55-5342-0362 Fax: +52 55-5342-0157 e-mail: deublin@prodigy.net.mx

#### **ASIA**

#### **DEUBLIN** China

No. 2, 6th DD Street, DD Port Dalian Liaoning Province, 116620, P.R. China

Phone: +86 411-87549678 Fax: +86 411-87549679 e-mail: info@deublin.cn

Room15A07, Wangjiao Plaza No.175 East Yan'an Road, Huangpu District

Shanghai, 200002, P.R. China Phone: +86 21-52980791 Fax: +86 21-52980790 e-mail: service@deublin.cn

#### **DEUBLIN** Asia Pacific

51 Goldhill Plaza, #11-11/12 Singapore 308900 Phone: +65 6259-9225

Fax: +65 6259-9723 e-mail: deublin@singnet.com.sg

#### **DEUBLIN** Japan

2-13-1, Minamihanayashiki Kawanishi City 666-0026, Japan Phone: +81 72-757-0099 Fax: +81 72-757-0120

e-mail: customerservice@deublin-japan.co.jp

2-4-10-3F Ryogoku

Sumida-Ku, Tokyo 130-0026, Japan

Phone: +81 35-625-0777 Fax: +81 35-625-0888

e-mail: customerservice@deublin-japan.co.jp

#### **DEUBLIN** Korea

Star Tower #1003, Sangdaewon-dong 223-25, Jungwon-gu, Seongnam-si, Gyeonggi-do,

South Korea

Phone: +82-31-8018-5777 Fax: +82-31-8018-5780

e-mail: customerservice@deublin.co.kr

#### **EUROPE**

#### **DEUBLIN** Germany

Nassaustraße 10

65719 Hofheim a. Ts., Germany Phone: +49 6122-8002-0 Fax: +49 6122-15888 e-mail: info@deublin.de

#### **DEUBLIN** Italy

Via G. Rossa 9, Loc. Monteveglio 40053 Comune di Valsamoggia (BO), Italy

Phone: +39 051-835611 Fax: +39 051-832091

e-mail: mauro.pozzato@deublin.it

Via Giovanni Falcone 36 20010 Bareggio (MI), Italy Phone: +39 02-90312711 Fax: +39 02-90278189 e-mail: info@deublin.it

#### **DEUBLIN** Austria

Trazerberggasse 1/2 1130 Wien, Austria Phone: +43 1-8768450 Fax: +43 1-876845030 e-mail: info@deublin.at

#### **DEUBLIN** France

61 bis, Avenue de l'Europe Z.A.C de la Malnoue 77184 Emerainville, France Phone: +33 1-64616161 Fax: +33 1-64616364 e-mail: service.client@deublin.fr

#### **DEUBLIN** Poland

ul. Kamienskiego 201-219 51-126 Wroclaw, Poland Phone: +48 71-3528152 Fax: +48 71-3276278 e-mail: info@deublin.pl

#### **DEUBLIN** Russia

ul. Kosygina, 13, 5th entrance, 1-st floor

119334, Moscow, Russia Phone: +7 495 647-14-34 Fax: +7 495 938-89-49 e-mail: info@deublinrussia.ru

#### **DEUBLIN** Spain

C/Lola Anglada, 20 local 1, 08228 Terrassa, Spain Phone: +34 93-2211223 Fax: +34 93-2212093 e-mail: deublin@deublin.es

#### **DEUBLIN** Sweden

Cylindervägen 18, Box 1113 13 126 Nacka Strand, Sweden Phone: +46 8 716 2033 Fax: +46 8 601 3033 e-mail: info@deublin.se

#### **DEUBLIN** United Kingdom

6 Sopwith Park, Royce Close, West Portway

Andover SP10 3TS, UK Phone: +44 1264-333355 Fax: +44 1264-333304 e-mail: deublin@deublin.co.uk

 $\ensuremath{ \odot}$  Copyright 2015 Deublin Company. All Rights Reserved. Printed in the U.S.A. MPSS151 US