

# Product Data Sheet



## R30AXSP

Replace "X" with 1, 2 or 3 for number of poles

### Reinforced Class R Fuse Holder 30 Amps, 250 Volts AC/DC



#### Wire Range:

#10 - #14 AWG Copper

**Holds fuse size 9/16" diameter X 2"**



SP Screw

Commonly used fuses in this holder: A2D-R, A2K-R, DLN-R, FLN-R, FLNR, KLN-R, KLN-R, KTS-R, LLNRK, LPN-RK, TLN, TR-R

[See table below for wire sizes.](#)

#### Electrical Ratings:

- 0 - 30A max (amperage rating based on maximum fuse rating for that physical size)
- Copper wire only
- 250 Volts AC/DC
- Approved for 200,000 Amp Withstand Rating

#### Mechanical Ratings:

- Insulator base temperature rating: -40°C/F to 125°C (257°F) UL RTI
- Flammability rating of insulator base: UL 94V-0
- Touch protection: IP-20 (IEC 60529) with optional cover CHR230 (See accessories)
  - Use outside these ratings needs to be judged in the end-use application.

#### Materials:

- Fuse Clip: Copper alloy, tin plated
- Reject Member: Steel, tin plated
- Reinforcing Spring: Steel, zinc plated
- Insulator base: Glass filled polycarbonate (thermoplastic)
- Straddle Plate #10-32 screws: Steel, nickel plated
- Fuse Clip anchor screws: Steel, zinc plated

#### Agency Approvals:

- UL Listed, Fuseholder standards UL 4248-1 and UL 4248-12.
- UL File No. IZLT.E35113
- CSA Certified, CSA C22.2 No. 39 – M1987, File No. LR21455
- CE compliant to IEC 60947-1
- RoHS Compliant


**Wire Approvals:**

Wire Size	Torque		Copper Wire Stranding Classes - Number of Conductors		
	N-m	In. lbs.	Solid	Class B	Class C
10	2.8	25	1	1	1
12	2.8	25	1	1	1
14	2.8	25	1	1	1

- Panel mountable: #10 fastener, torque to 25-30 in. lbs. (2.8 - 3.4 N-m)

**Accessories:**

- Cover: CHR230. Glass-filled polycarbonate (thermoplastic). 125°C (UL RTI), Flammability rating UL 94 V-0, UL Listed File No. JDVS2.181825.
- DIN Rail Adapter: Din R-1

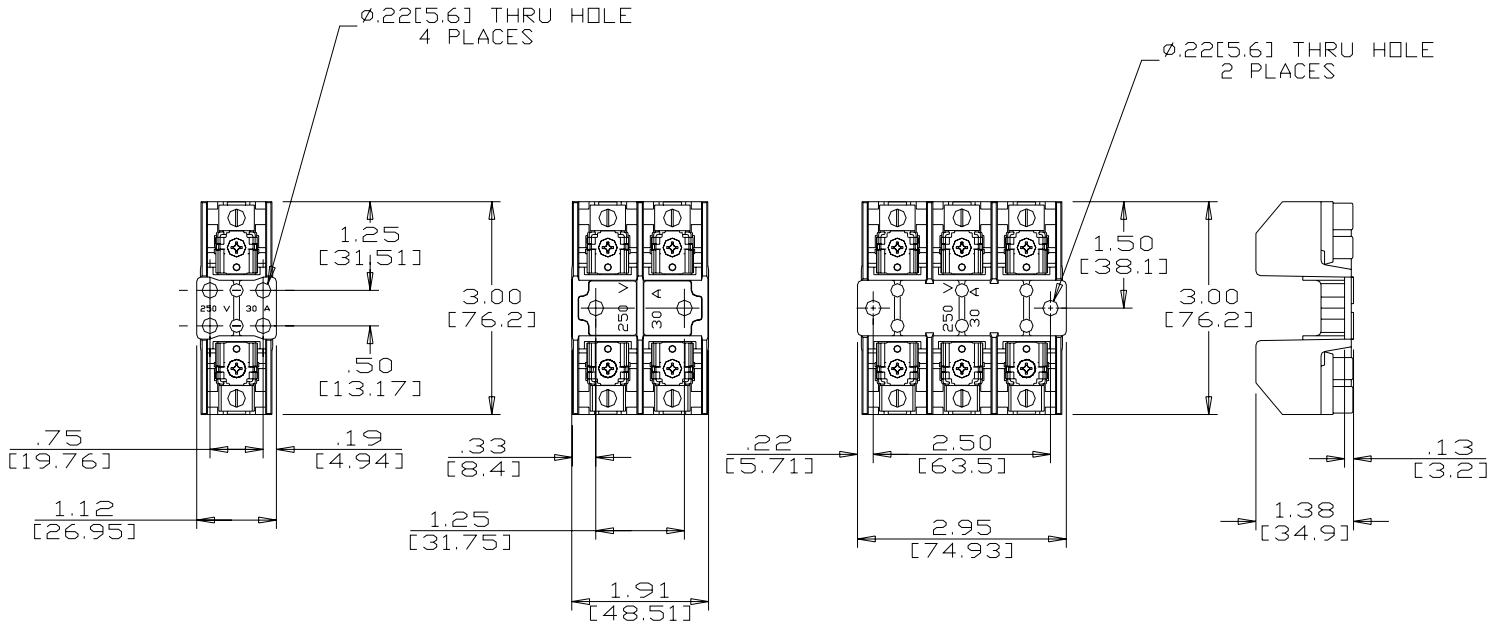

[WWW.MARATHONSP.COM](http://WWW.MARATHONSP.COM)  
1-419-352-8441