

Data Sheet

SolidSense II® Pressure Transducers

Pressure Transducers



SolidSense II® Pressure Transducers

Superior stability and reliability for demanding pressure measurement applications

Overview

The Brooks® SolidSense II® Pressure Transducers are designed for stable, accurate, and reliable pressure monitoring in high purity and ultra-high purity (UHP) applications. A combination of optimum design and materials improves both signal stability and reliability in numerous pressure measurement applications.

Pressure transducers are widely used in high purity and ultra-high purity fluid storage and delivery systems in many industries. Unfortunately, a number of current transducers rely on technologies that have problems with zero and span drift, thermal shift, and case stress. Adjusting the transducer to rectify errors requires ongoing maintenance that increases downtime and cost of ownership.

The third generation SolidSense II pressure transducers by Brooks Instrument utilize glass-fused strain gauge technology enabling a new level of performance for micro electronics and industrial applications.

SolidSense II pressure transducers employ ultra stable, micro machined silicon strain gauges that are matched and fused to the metal diaphragm at high temperature to relieve manufacturing induced stress. The process reduces drift or lack of zero stability commonly associated with competitive products. Consequently, down time for zero adjustment to compensate for drift is significantly reduced. In addition, the unique mechanical design eliminates torque effects during installation.

SolidSense II digital architecture enables automated software driven calibration and a wide range of thermal compensation routines, unlike the passive compensation used in competitive devices. This enhances measurement repeatability regardless of changes to the operational environment.

SolidSense II devices feature 316L stainless steel wetted surfaces electropolished to 5- and 10-micro in. (5- and 10-Ra) to maintain the purity of the measured fluid.

Product Description


Industry Standard Interface
Options and outputs

Digital Thermal Compensation
Multi-point temperature compensation

Digital Linearization
Consistency of performance

Stress Isolation Stage
To reduce stress introduced during mounting

Fully Swept Flowpath
Complete removal of residual gas

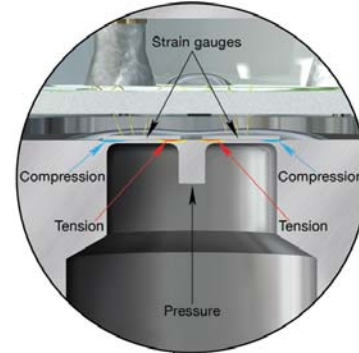

Sensor Attachment
Glass fusion bonding to relieve stress

Sensor Construction
Paired strain gauges to reduce stress induced drift

Wetted Materials
316L meets SEMI F20

Features	Benefits
Two pairs of strain gauge sensors	Precision matched sensors for improved performance
Glass fusion process to bond strain gauge	High temperature glass bonding drives off any mechanically induced build up of stress from sensor manufacturing process
Stress isolation stage	Minimizes stress introduced during installation of the transducer
Digital temperature compensation	Improved thermal stability over entire range of temperature
Digital linearization and calibration	Consistency of performance, improved reproducibility
Fully swept flowpath	Ensures contamination-free pressure measurement
Integrated fully rotatable display option	Local indication of process pressure for safe system maintenance Compact with no special wiring for easy system integration/installation

Product Description

Sensor Construction

SolidSense II utilizes proprietary micro machined silicon strain gauges that are ultra stable and suitable for high purity and ultra-high purity requirements.

A design feature for controlling stress is the use of dual paired gauges. By using two paired gauges in Wheatstone bridge circuitry, pressure signal is maximized enhancing stability.

Sensor Attachment

A key step for eliminating machining stress in the diaphragm is the glass fusion process used to bond the strain gauges to the sensor diaphragm. This process occurs at 600°C and drives off any mechanically induced build up of stress resulting in a highly stable and accurate sensor.



By using silicon strain gauge technology and the glass fusion bonding method for SolidSense II, there is no stress induced from thermal gradients between structural materials. In some competitive designs, different thermal expansion coefficients between the metal casing and ceramic electrode (upon which the sensor is mounted) allow for flexing of the sensor which is interpreted as a false pressure change.

Stress Isolation Stage

SolidSense II incorporates an isolation stage shown at right that minimizes stress from: (1) thermal heating during any adjacent welding and (2) torque during installation in gas panels, gas interface boxes, valve manifold boxes, etc. By preventing stress during these two scenarios, creep (drift) is eliminated during subsequent usage.


Wetted Materials

Made from 316L that meets SEMI F20. Surface finish complies with SEMI F19. Product is assembled in clean environment compliant with ASTM F1374-92 - meets requirement for ultra-high purity application.

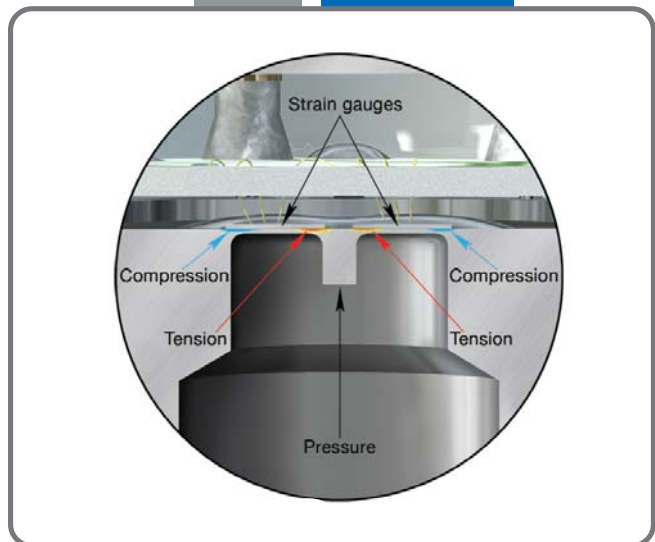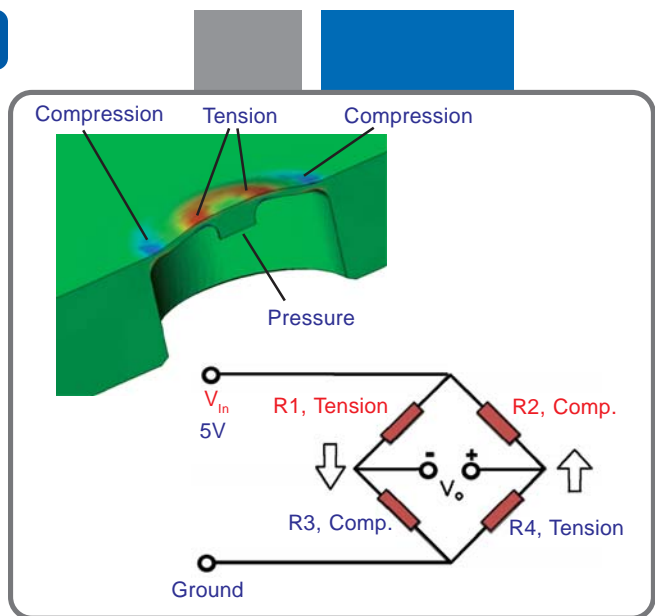

Fully rotatable display


This integrated display option reduces gas panel overall size constraints by eliminating the requirement for a standalone pressure gauge and reduces height by 2-6 inches. The display is fully rotatable - covering 4 quadrants - and no tools are required to set/secure the position. A bright LED display ensures readability in typical compact installation conditions. It provides exact visual feedback and verification of line pressure and an over pressure indication (roughly at 110% FS). The fully integrated display combined with the SSII high performance provides exact pressure measurement choice for field upgrades and new gas processing system designs.

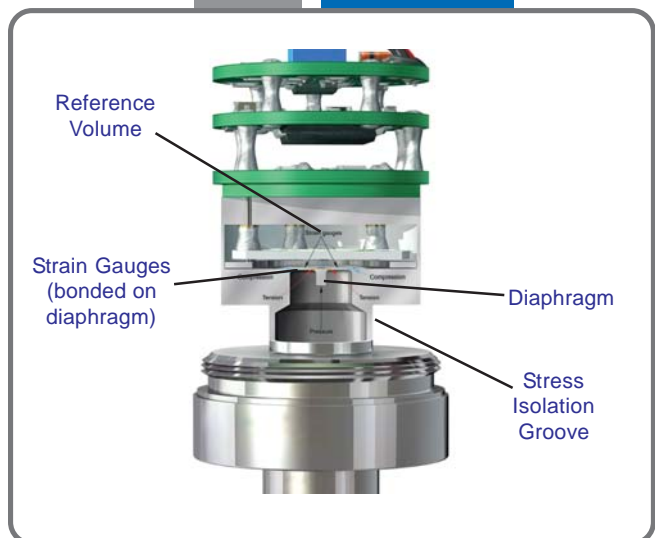

Product Description



Digital Linearization and Calibration

SolidSense II is calibrated with automated software which uses about 200 linearization points compared with 2 for some competing units. This results in consistency of performance from one transducer to the next (reproducibility). Due to automation, operator induced differences are eliminated.

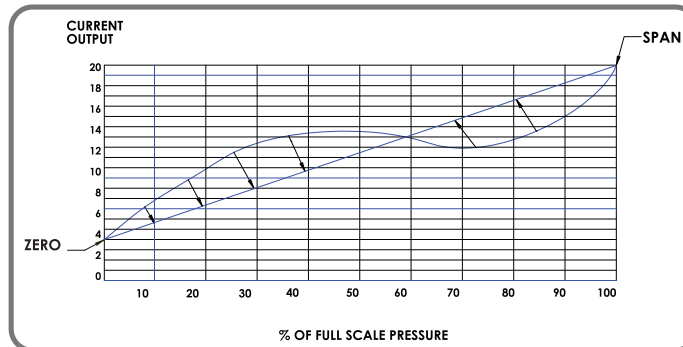

Digital Thermal Compensation



SolidSense II uses multi-point digital temperature compensation. Some competitive devices rely on single or two point compensation to optimize device performance over the operating temperature range. For example, device performance might be checked at -10°C and 60°C to determine the dZ/dT and dS/dT (rate of zero/span change per temperature change) with the temperature compensation interpolated for other values. SolidSense II can incorporate five separate data points, which are typically taken at -10°C, -5°C, 20°C, 40°C and 60°C, giving the temperature compensation algorithm far better resolution.

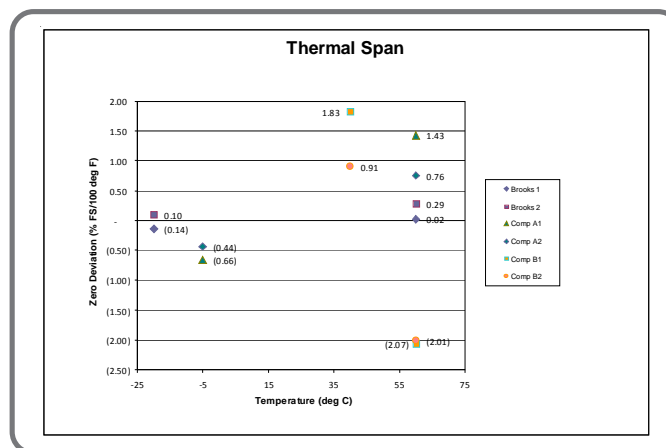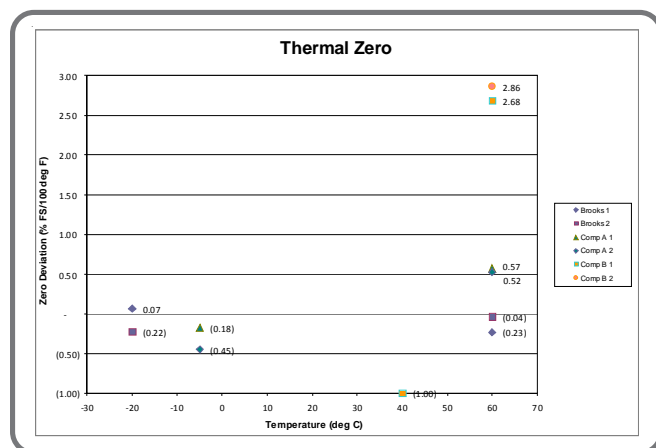

Fully swept flowpath

The SolidSense II incorporates an all-swept flowpath and very small internal volume allowing complete removal of residual fluid during the purge cycle. As a result inert, dry and clean surfaces are available at the end of the purge cycle.

ASTM F1397 establishes a dry-down requirement to 20 ppbv H₂O within 30 minutes. As accompanying data shows, the dead end configuration of the SolidSense II recovered to desired level within 11.5 minutes and the flow thru configuration recovered in 9.5 minutes, both well below the requirement indicated in standard.

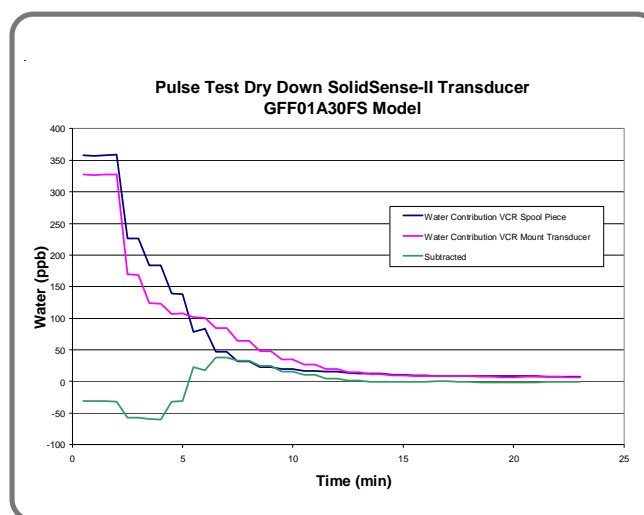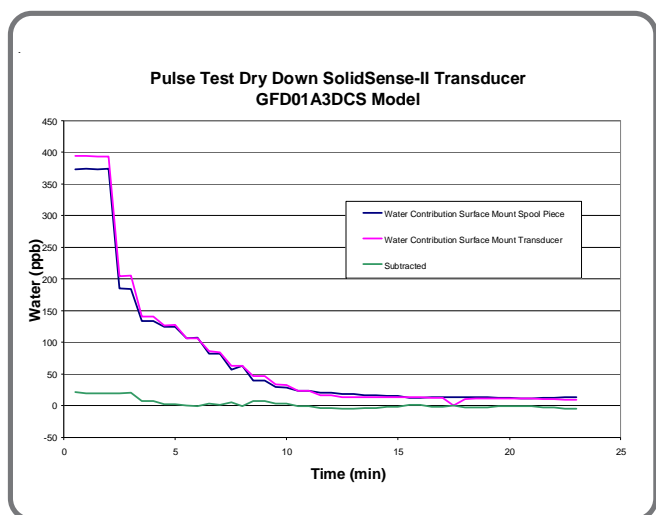


Product Description


Robustness

The SolidSense II design incorporates a stress isolation stage. This prevents stresses built up during installation of transducers from being transmitted to diaphragm. As a result, SolidSense II will not require frequent resetting of zero after installation and in operation.

A number of applications involve subjecting the pressure transducer to rapid pressure cycling in a purge cycle. As shown in test results, SolidSense II will not temporarily indicate inaccurate pressure readings due to the Joule-Thompson effect. In some competitive devices this may cause false alarms and shut down the gas distribution system.

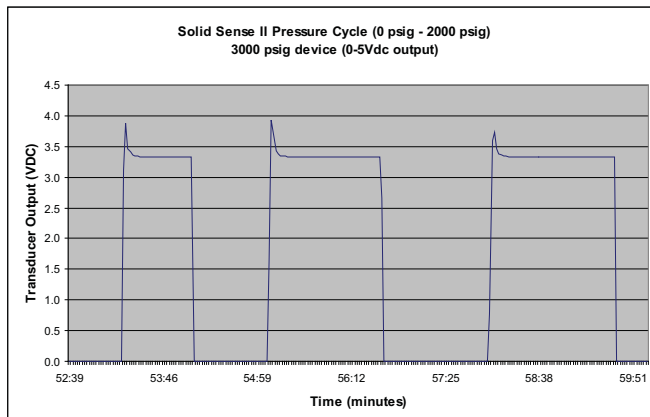


Accurate pressure readings during purge cycle

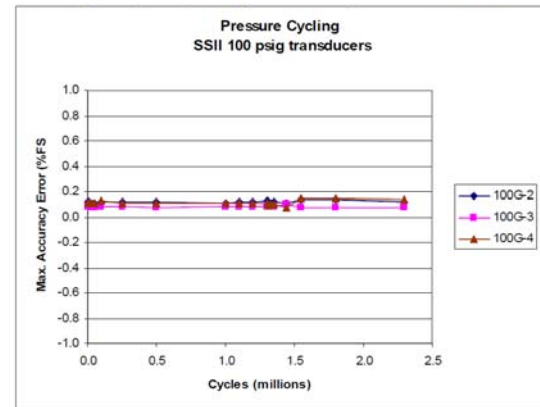

Stability - 2,000,000 pressure cycles without failure

Zero Stability

Minimal drift, creep and shifts during installation and service life.

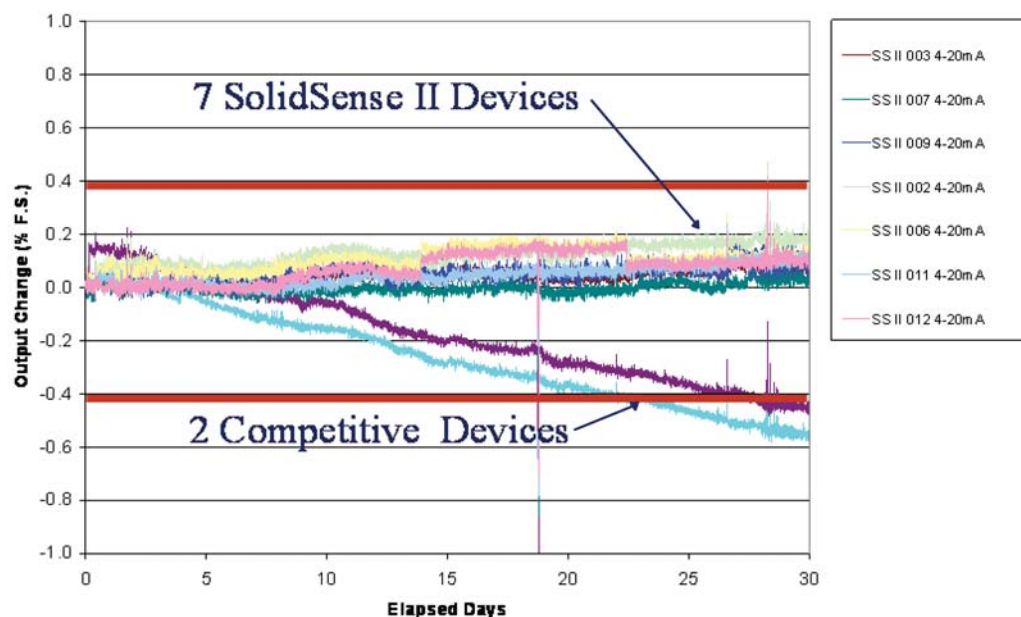

Metrology

Calibration system that is traceable to international primary standards with minimal uncertainty - precise dependable pressure measurements.

Product Applications


Semiconductor Manufacturing

Ultra-high purity gases and liquids are at the heart of semiconductor manufacturing operations. Their safe storage and distribution is vital to uninterrupted production. Gas cabinets, gas panels, valve manifold boxes and distribution valve boxes all require reliable pressure measurement of these fluids.

Several design features and manufacturing processes described in more detail elsewhere in this data sheet enable superior accuracy and long-term stability. Two are emphasized here: The sensor isolation stage minimizes stress coupled from adjacent welding operations and torque from installation. By isolating stress during these two scenarios, stress-related creep or drift is eliminated.


All gas cabinets are designed to handle purge cycles to facilitate safe changeover of cylinders. Whether these are automatic or manual, it is common to introduce a big surge in pressure followed by vacuum over very short period of time. Test results show that SolidSense II will not temporarily indicate inaccurate readings during purge cycles due to Joule-Thompson effect.

Brooks SolidSense II Pressure Transducer (Pigtail)

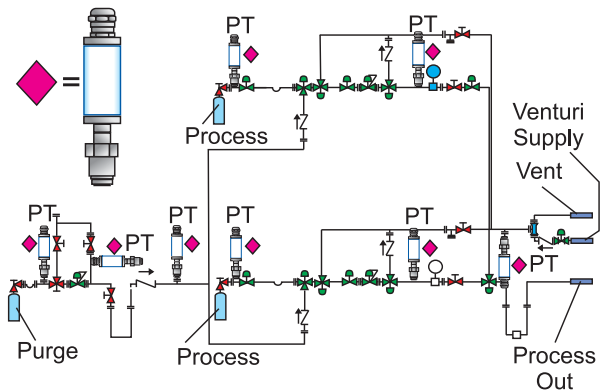

Typical Gas Panel Schematic

SolidSense II Pressure Transducer flow-through configuration on a Valve Manifold Panel

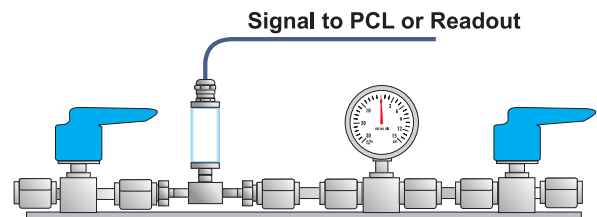


SolidSense II Pressure Transducer (T4) has a fully swept path which greatly reduces contamination and eliminates the need for cleaning solvents and disassembly.

Product Applications


Measure build-up across filters

Many sanitary processes use filters to ensure product quality. As the load on the filter increases, a pressure differential between the inlet and outlet sides of the filter can be measured using SolidSense II. Once an established differential limit is reached, the filter can be preventively replaced before throughput goes down.

Brooks SolidSense II Pressure Transducers Thru-Flow (T4) used to monitor in-line filters

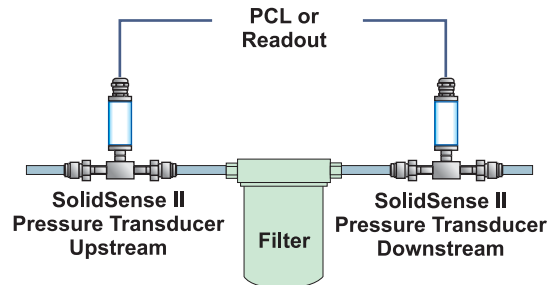

Monitoring Differential Pressure to Scheduled Filter Replacement

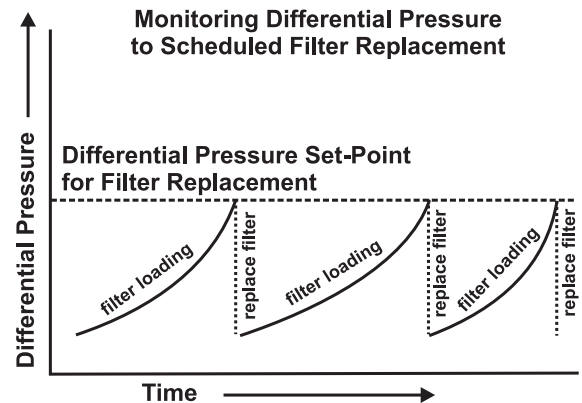

Product Specifications

Performance	Non-Display Version	Display Version
Temperature:		
Operating:	-20°F to 180°F (-29°C to 82°C)	-20°F to 140°F (-29°C to 60°C)
Storage:	-40°F to 180°F (-40°C to 82°C)	-40°F to 167°F (-40°C to 75°C)
Compensated:	-4°F to 140°F (-20°C to 60°C) / 68°F to 140°F (20°C to 60°C) 0-10 Vdc version	
Burst Pressure:	400% full scale	
Proof Pressure:	200% full scale up to 2,000 psi, 150% full scale for higher ranges	
Accuracy:	0.25% full scale (BFSL)	
Response Time:	< 5 msec	
Zero and Span Temperature Coefficient (<i>each</i>):		
≥100 PSI Ranges Full Scale:	±0.02% full scale/°F (-4°F to 140°F, -20°C to 60°C) ±0.50% full scale (68°F to 140°F, 20°C to 60°C) 0 to 10 Vdc version	
<100 PSI Ranges Full Scale:	±0.04% full scale/°F (-4°F to 140°F, -20°C to 60°C) ±1.00% full scale (68°F to 140°F, 20°C to 60°C) 0 to 10 Vdc version	

Mechanical

Housing:	Stainless steel, polymer plastics
Wetted Parts:	VIM-VAR 316L stainless steel, SEMI F20
Surface Finish:	Compliant with SEMI F19
Cleanliness:	Compliant to ASTM F1374-92 (2005)
Internal Volume:	1.79cc
Process Connections:	(See Product Configurations for available options)
Approximate Shipping Weight:	0.70 lb. (0.32 kg)

Electrical	Non-Display Version	Display Version
Supply Current:	Max. 10 mA	Max. 30 mA
Power Requirements:	10 to 30 Vdc for 4 to 20 mA output 11 to 30 Vdc for 0 to 5 Vdc output 13 to 32 Vdc for 0 to 10 Vdc output	15 to 30 Vdc for 4 to 20 mA output and no signal output 11 to 30 Vdc for 0 to 5 Vdc output 13 to 30 Vdc for 0 to 10 Vdc output
Electrical Connections: (See page 11 for full list)	Code B Code P Code D Code K Code A Code G Code H	Bendix® connector Pigtail 6 ft long 15-pin HD D-sub connector 9-pin D-sub 4 ft pigtail with AMP® connector (3 pin) 4 ft pigtail with AMP® connector (4 pin) 6 inch pigtail with Molex® connector
Electrical Protection:	Reverse polarity for power connections	


Optional Display

Digits:	N/A	-xxx to 1xxx
Type:	N/A	7 Segment Red LED
Polarity:	N/A	Automatic (-) Display
Over Pressure Reading Trigger:	N/A	110% full scale ± 5% full scale (Display reading: 1---)
Display Accuracy: (excluding transducer output)	N/A	±-0.25% of Rdg ± 1 Count for psi ± - 0.25% of Rdg ± 5 Count for kPa
Character Size:	N/A	0.30" height
kPa/psi Switch:	N/A	Yes
Rotatable:	N/A	Continuous rotation covering 4 quadrants
Zero Pot:	N/A	Yes
Zero Pot Adj. Screwdriver:	N/A	1-1.2 mm flat type


Approvals and Compliance

FM Approval:	Non-Incendive for use in Class I, Div II Groups A, B, C and D Hazardous Applications Excludes 0 to 10 Vdc and 15-pin HD D-Sub connector configurations, GI/integrated display pending
EMC:	Compliant to EU Directive 2004/108/EC
RoHS:	Compliant to EU Directive 2002/95/EC


Product Dimensions (Standard Configurations)

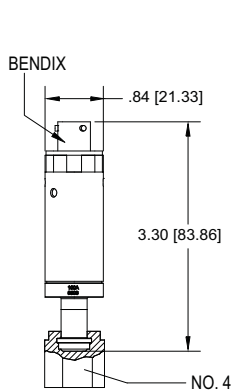


VCR SWIVEL FEMALE BENDIX
GFDXXXXBSF
FITTING A333124002

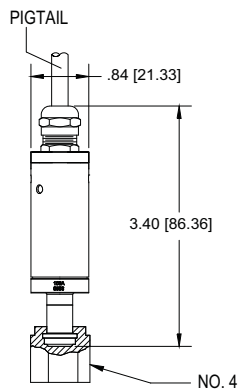


VCR SWIVEL FEMALE PIGTAIL
GFDXXXXPSF
FITTING A333124002
CABLE ME0521302-001

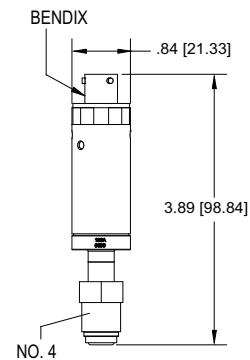


VCR SWIVEL MALE BENDIX
GFDXXXXBSM
FITTING A333124001

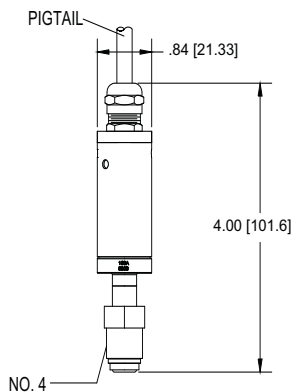


VCR SWIVEL MALE PIGTAIL
GFDXXXXPSM
FITTING A333124001
CABLE ME0521302-001

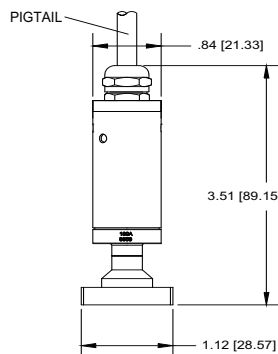


1 1/8" C-SEAL W/AMP ON PIGTAIL
GFDXXXXMCS
FITTING A333127001
CABLE ME0521302-001

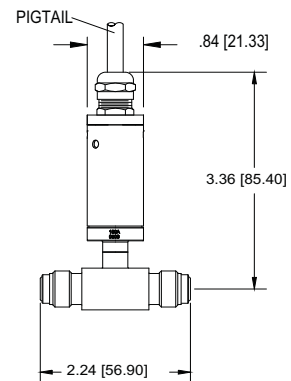

VCR FIXED MALE
THRUTUBE PIGTAIL
GFFXXXXPVM
FITTING A333125004
CABLE ME0521302-001

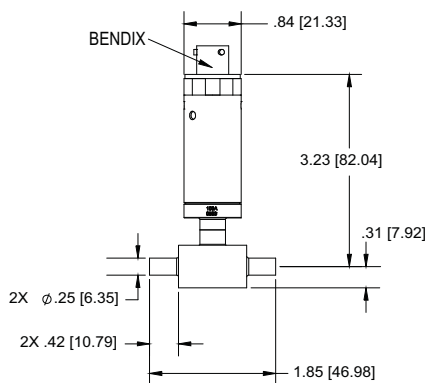


TUBE STUB/TUBE STUB
THRUTUBE BENDIX
GFFXXXXB4T
FITTING A333125001

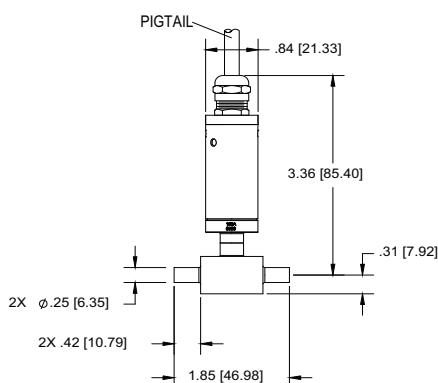

TUBE STUB/TUBE STUB
THRUTUBE PIGTAIL
GFFXXXXP4T
FITTING A333125001
CABLE ME0521302-001

Shown are just a few of the most common configurations of the SolidSense II® pressure transducers. The SolidSense II pressure transducers are available in over 40 configurations. For more information and a complete selection of configurations available see the Brooks Instrument Installation and Operation Manual "X-PR-SolidSense II-PT-eng" by visiting our website at www.BrooksInstrument.com or contact your nearest Brooks customer service representative for assistance.


Product Dimensions (GID/GIF Options)

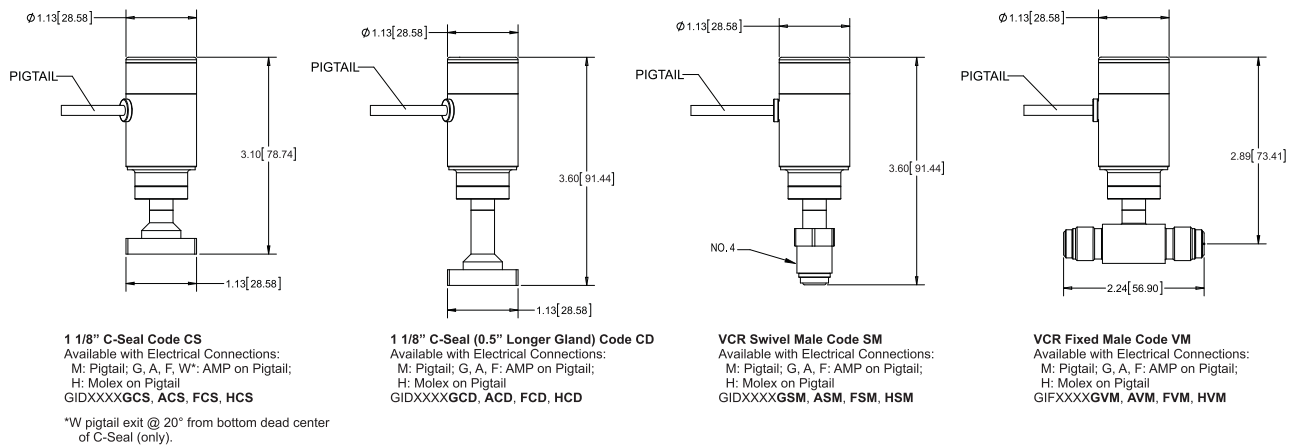

Product Dimensions (Optional Display LR056)

Local display option for SolidSense II with Bendix connector and 4-20 mA output

LR056
Pressure
Transducer
Display
Dimensions

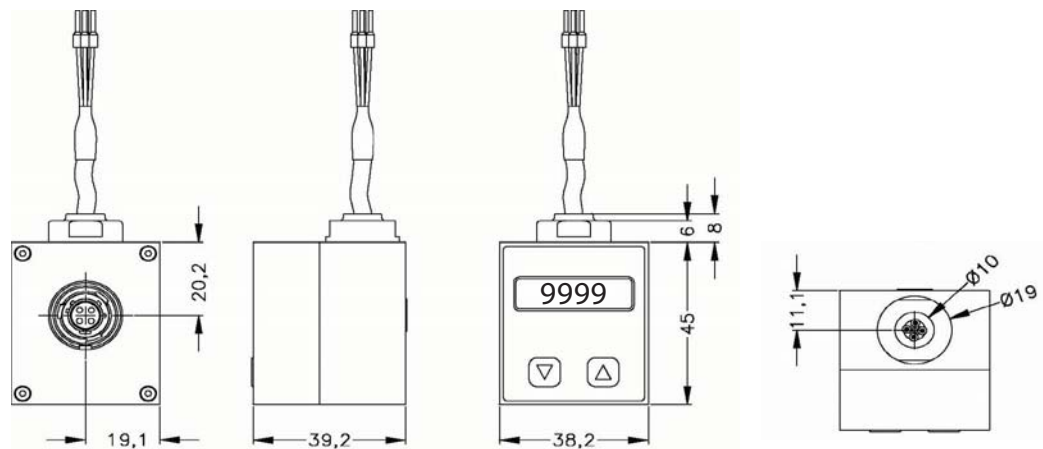

The SolidSense II pressure transducer is available with an optional display: Model LR056, for details on this display see **DS-PR-LR056-eng**

Visit the Brooks Instrument website for product documentation at: www.BrooksInstrument.com/Manuals.

Optional Cables Available for the SolidSense II Pressure Transducers

Cable Part Number	Cable Description	Cable length	Transducer Electrical Connector Required	Transducer Output
EL0001965104	Cable w/ four pin female Bendix connector to connect to transducer; flying leads on opposite end for power connection	10ft.	4 pin male Bendix	4-20 mA
EL0001965105	Cable w/ four pin female Bendix connector to connect to transducer; flying leads on opposite end for power connection	25ft.	4 pin male Bendix	4-20 mA

Model Code

Code Description	Code Option	Option Description
I. Base Model Code	GF	Pressure Transducer
	GI	Pressure Transducer with integrated display
II. Body Type	D	Dead End
	F	Flow Through
III. PSI	00	30
	01	100
	02	250
	X2	235
	05	500
	10	1000
	25	2500
	30	3000
	60	60
	15	1500 Torr
IV. Pressure Reference	A	Absolute, psi
	C	Compound, psi
	G	Gauge, psi
	B	Absolute, Bar
	P	Compound, Bar
	S	Gauge, Bar
	T	Absolute Torr
V. Output	3	0.00 to 10.00 Vdc
	4	4 to 20 mA
	5	0.05 to 5.05 Vdc
	6	0.2 to 5.2 Vdc
	7	2 to 10 Vdc
	8	No signal output (GI model with display only)
VI. Electrical Connection	B	Bendix® Connector
	P ^x	6 ft (2m) Pigtail
	D	15 Pin HD D-Sub Connector - Voltage Output Only
	E	9 inch Pigtail with 15 Pin (Standard) D-Sub Connector - Voltage Output Only
	M+	5 inch (0.127m) Pigtail with AMP® Connector (4-pin) - Voltage Output Only
	J	Bendix® with Jumper B-D (Offered with 4-20 mA only)
	L	10 ft (3m) Pigtail
	R+	8 inch Pigtail with AMP® Connector (4-pin)
	W+	2 inch Pigtail with AMP® Connector (4-pin) plus 1" strain relief (+/- 1/8") at 20° angle from bottom dead center
	N ^x	16.5 ft cable with Bendix® Type (Bayonet)
	V+	18 inch Pigtail with 6-pin Molex® Connector
	G+	4 ft Pigtail with AMP® Connector (4-pin) - Voltage Output Only
	H+	6 inch Pigtail with Molex® Connector
	K	9-pin D-Sub - Voltage Output Only
	A+	4 ft Pigtail with AMP® Connector (3-pin) - Current Output Only
	S	2m (79") Pigtail with 9-Pin D Connector - Current Output Only
	Z ^x	36 inch Pigtail with Bendix® Connector (Bayonet)
VII. Fittings	4S	Tube Weld Stub 1/4" O.D. (GFD Only)*
	CS+	Surface Mount, 1.125" C-Seal, Standard (GFD & GID Only)
	CH	Surface Mount, 1.5" C-Seal, High Flow K1H (GFD Only)
	SC	Surface Mount, 1.5" C-Seal (GFD Only)
	CD+	Surface Mount, 1.125" C-Seal, 0.5" longer gland (GFD & GID Only)
	NT	1/4" NPT (GFD only)
	VM+	Face Seal, fixed male (x2 on Duncan T for GFF) (GFF & GIF Only)
	VS	Face Seal, fixed male/swivel female on Duncan T (GFF Only)
	SM+	Face Seal, swivel male (x2 on Duncan T for GFF)
	SF	Face Seal, swivel female (x2 on Duncan T for GFF)
	4T	Duncan T, 1/4" Tube Weld Stub (GFF Only)*

* Tube stubs (4S, 4T, 3T and 2T) are not suitable for compression joint.

GID/GIF Integrated Display options are only available with the fittings and connectors noted with "+". These connectors are not available for GFX models.

^x These connectors are available with both GIX & GEX models.

Sample Model Code	I	II	III	IV	V	VI	VII	VIII
	GF	F	02	C	4	P	SF	

Brooks Service and Support

Brooks is committed to assuring all of our customers receive the ideal flow solution for their application, along with outstanding service and support to back it up. We operate first class repair facilities located around the world to provide rapid response and support. Each location utilizes primary standard calibration equipment to ensure accuracy and reliability for repairs and recalibration and is certified by our local Weights and Measures Authorities and traceable to the relevant International Standards.

Visit www.BrooksInstrument.com to locate the service location nearest to you.

START-UP SERVICE AND IN-SITU CALIBRATION

Brooks Instrument can provide start-up service prior to operation when required. For some process applications, where ISO-9001 Quality Certification is important, it is mandatory to verify and/or (re)calibrate the products periodically. In many cases this service can be provided under in-situ conditions, and the results will be traceable to the relevant international quality standards.

CUSTOMER SEMINARS AND TRAINING

Brooks Instrument can provide customer seminars and dedicated training to engineers, end users, and maintenance persons.

Please contact your nearest sales representative for more details.

Due to Brooks Instrument's commitment to continuous improvement of our products, all specifications are subject to change without notice.

TRADEMARKS

Brooks & SolidSense II are trademarks of Brooks Instrument, LLC
All other marks are the property of their respective owners.



Global Headquarters

Brooks Instrument
407 West Vine Street
Hatfield, PA
19440-0903 USA

Toll-Free (USA): 888-554-FLOW
T: 215-362-3500
F: 215-362-3745

BrooksAM@BrooksInstrument.com

A list of all Brooks Instrument locations and contact details can be found at www.BrooksInstrument.com

© Copyright 2017 Brooks Instrument, LLC All rights reserved. Printed in U.S.A.

BROOKS[®]
INSTRUMENT