



Standard Encoder EEZ 58

Optical incremental shaft encoder with inch mounting dimensions available with Sine/Cosine Signals

C 1 11 Z
 e 7,1/6 ol
 nt 4 l
 er 6
 in 2
 g m
 di m
 a =
 m
 et
 er
 S 6,1/4 Z
 h 3 ol
 af 5 l
 t 0
 di m
 a m
 m =
 et
 er

Resolution

Resolution (Pulses/Revolution):			
1 - 6000	7000	7200	7500
8000	8192	9000	9144
10000			
Every other resolution up to 500 000 on request			

Type explanation

EEZ 58-6-2500-05-D-RC12

Encoder type	Incremental
Flange diameter	ø 58 mm
Case diameter	ø 58 mm
Special flange	Yes
Number of channels	3 = A + B + M 6 = AA + BB + MM
Resolutions	xxxx = Impulse pro Umdrehung
Supply voltage	05 = 5 VDC ± 5% 30 = 10..30 VDC
Output driver	D-RS422 P S
Position of connection	R S
Connector	C07 = 7 pins Binder C12 = 12 pins M23 M10 = 10 pins MIL
Shaft diameter	ø 6 mm

Technical data

Mechanical data

Rotational speed	? 12000 min ⁻¹
shaft loading	? 20 N radial ? 10 N axial
Angular acceleration	? 10 ⁴ rad/sec ²
Weight	? 0,4 kg

Environmental conditions

Vibration	200 ms ⁻² (20 ... 2000 Hz)
Shock	2000 ms ⁻² (11 ms)
Operating temperature	0 .. +80°C standard -20 .. +110°C optional -42 .. +110°C optional
Atmospheric humidity	? 95% r.h.
Protection class	IP 65 (DIN 40050/IEC 801) IP 68 (optional)

Electrical data

Scanning type	Optical, without contact
Transmitter, infrared	LED
Receiver	Photo-Transistor
Measurement accuracy	± 1' standard ± 10" optional
Supply voltage	Vcc = 5 VDC ±5% Vcc = 10...30 VDC
Power consumption	200 mA max.
Output frequency	? 300 kHz (Output D) ? 160 kHz (Output P, S)
Signal level	High > Vcc -2 V (Output D, P) Low < 0,5 V (Output D, P) Analog 1 Vss (Output S)
Load capacity of the outputs	20 mA

Cable 3 channels

Wire colour	Signal
Brown	+Vcc
White	0 V GND
Green	Signal A
White	Signal B
Yellow	Signal M
Shield	N.C.

Cable 6 channels

Wire colour	Signal
Brown 0,5 mm ²	+Vcc
Blue	+Vcc Sense ¹⁾
White 0,5 mm ²	0 V GND
White	0 V Sense
Brown	Signal A+
Green	Signal A-
Grey	Signal B+
Pink	Signal B-
Red	Signal M+
Black	Signal M-
Shield	N.C.

1) nur bei Vcc = 5 VDC TTL

Connector 7 pins Binder

Connection	Signal
Pin 1	0 V GND
Pin 2	N.C.
Pin 3	Signal A
Pin 4	Signal B
Pin 5	+Vcc
Pin 6	Signal M
Pin 7	Shield

Connector 12 pins M23

Connection	Signal
Pin 1	Signal B- ¹⁾
Pin 2	+Vcc Sense ²⁾
Pin 3	Signal M+
Pin 4	Signal M- ¹⁾
Pin 5	Signal A+
Pin 6	Signal A- ¹⁾
Pin 7	N.C.
Pin 8	Signal B+
Pin 9	Shield
Pin 10	0 V GND
Pin 11	0 V Sense
Pin 12	+Vcc

1) nur bei 6 Ausgangskanälen

2) nur bei Vcc = 5 VDC TTL


Connector 10 pins MIL

Connection


	Signal
Pin A	Signal B+
Pin B	Signal A+
Pin C	Signal M+
Pin D	+Vcc
Pin E	+Vcc Sense
Pin F	0 V GND
Pin G	Shield
Pin H	Signal B- ¹⁾
Pin I	Signal A- ¹⁾
Pin J	Signal M- ¹⁾

1) nur bei 6 Ausgangskanälen


Output driver

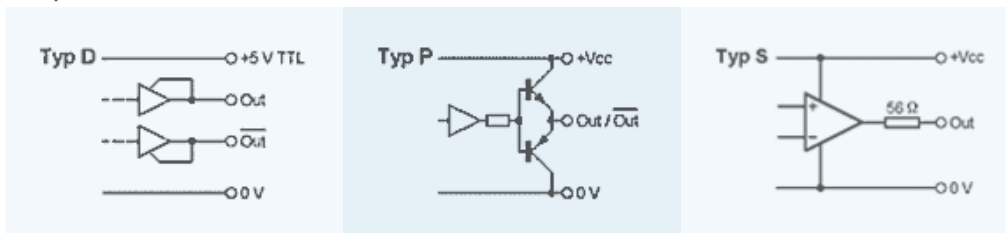

Output channels / Output signals

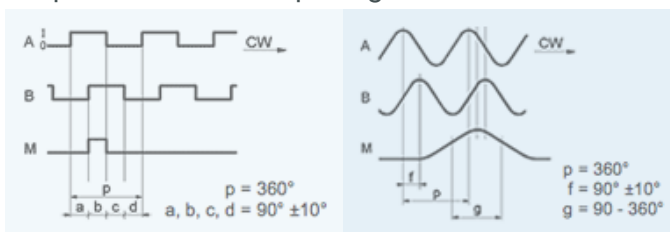

Outline drawing

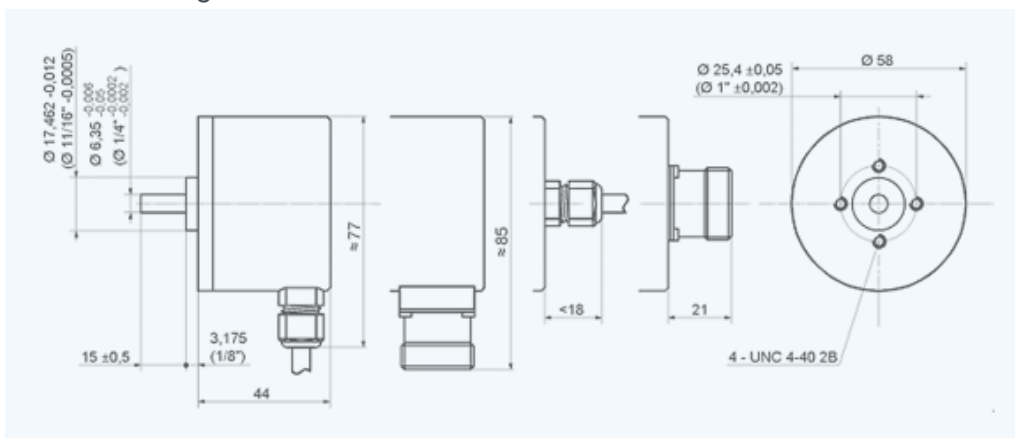

Version E 542-210 · Subject to change