


WELDING TRANSFORMERS

Three Phases: Spot - Seam - Brazing

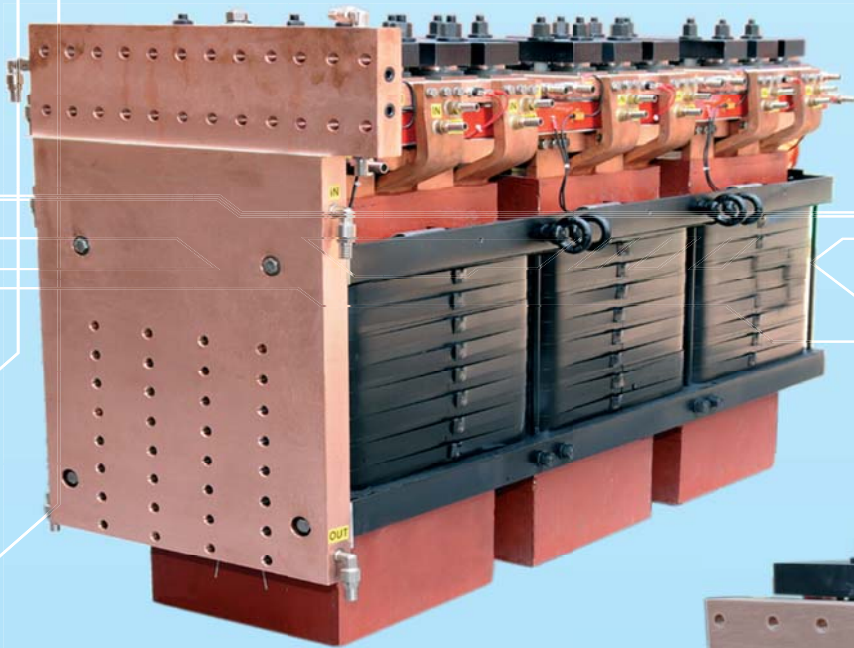

TECHNOLOGY

RELIABLE

INNOVATION



CUSTOMIZED



TYPE	Primary Voltage	Rated Power	Secondary Voltage	Max Secondary Current
TC 60	400 Volt 50/60 Hz	160 KVA AL 50%	5 - 6.2 - 7.4 Volt	65 KA
TC 60 V1	400 Volt 50/60 Hz	180 KVA AL 50%	9 - 10 - 12 Volt	70 KA
TC 100	400 Volt 50/60 Hz	280 KVA AL 50%	6.2 - 7.1 - 8.1 Volt	120 KA
TC 100 V2	400 Volt 50/60 Hz	500 KVA AL 50%	8 - 9 - 10 Volt	120 KA
TCR 48	400 Volt 50/60 Hz	1000 KVA AL 50%	8 - 9 - 10 Volt	240 KA
TC 40 B	400 Volt 50/60 Hz	90 KVA AL 100%	4 - 4.5 - 5 Volt	45 KA
TC 60 B	400 Volt 50/60 Hz	150 KVA AL 100%	4 - 4.5 - 5 Volt	90 KA
TC 60 S	400 Volt 50/60 Hz	180 KVA AL 100%	4 - 5 - 6 Volt	90 KA
TC 75 V1	400 Volt 50/60 Hz	250 KVA AL 100%	6 - 7 - 8 - 9 Volt	90 KA
TC 100 B	400 Volt 50/60 Hz	300 KVA AL 100%	4 - 5 - 6 Volt	120 KA
TC 36 V1	400 Volt 50/60 Hz	400 KVA AL 100%	4.6 - 5.7 - 6.5 Volt	180 KA



SAFCO Systems s.r.l.

Via Isonzo, 17/b - 20090 Cesano Boscone (MI) - ITALY - Phone +39 02 4504433 - +39 02 4504435

Fax +39 02 4504321

E-mail: info@safcosys.it - Web Site: www.safcosys.it

