


DIMENSION TABLE FOR TWIN FU-NUT

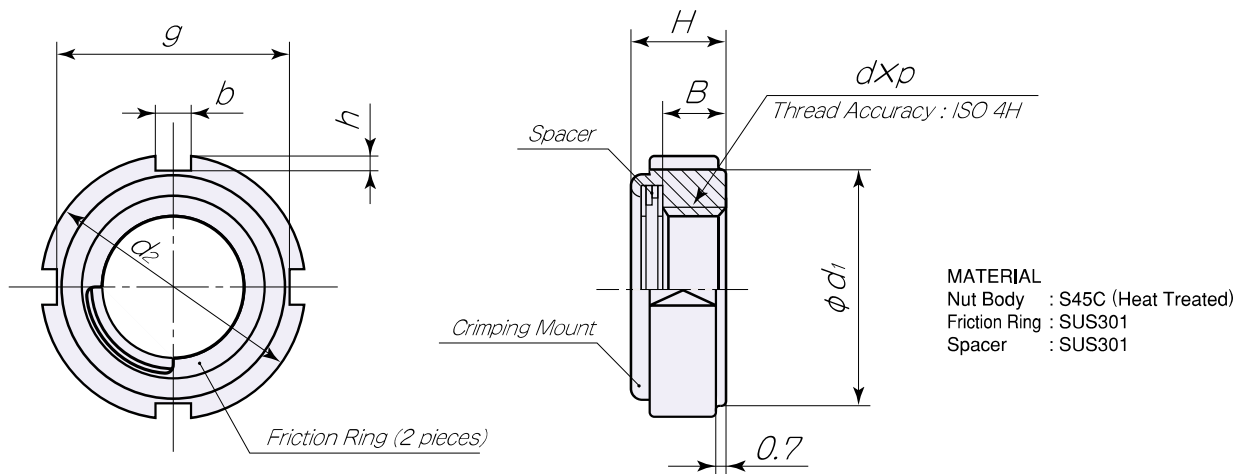

* Simultaneous processing of the thread and the bearing surface.

Dimensions in millimeters

Code No.	d_{Xp}	ϕd_1	d_2	H	B	b	h	g	$\phi_{min} = B + 3.5\rho$	Allowable axial dead load (KN)
TFU02SC	M15×1	21	25	9.9	7	4	1.8	21.4	10.5	34.1
TFU03SC	M17×1	23.5	28	10.1	7	4	2	24	10.5	38.6
TFU04SC	M20×1	27	32	12.3	9	4	2	28	12.5	59.4
TFU05SC	M25×1.5	33	38	14.2	10	5	2	34	15.3	80.8
TFU06SC	M30×1.5	40	45	14.3	10	5	2	41	15.3	97.0
TFU07SC	M35×1.5	47	52	16.5	12	5	2	48	17.3	137.8
TFU08SC	M40×1.5	52	58	17.6	13	6	2.5	53	18.3	171.4
TFU09SC	M45×1.5	59	65	19.7	15	6	2.5	60	20.3	224.5
TFU10SC	M50×1.5	64	70	20.8	16	6	2.5	65	21.3	266.8