




vCOM COMMUNICATION SYSTEMS
SMGM | SMGX

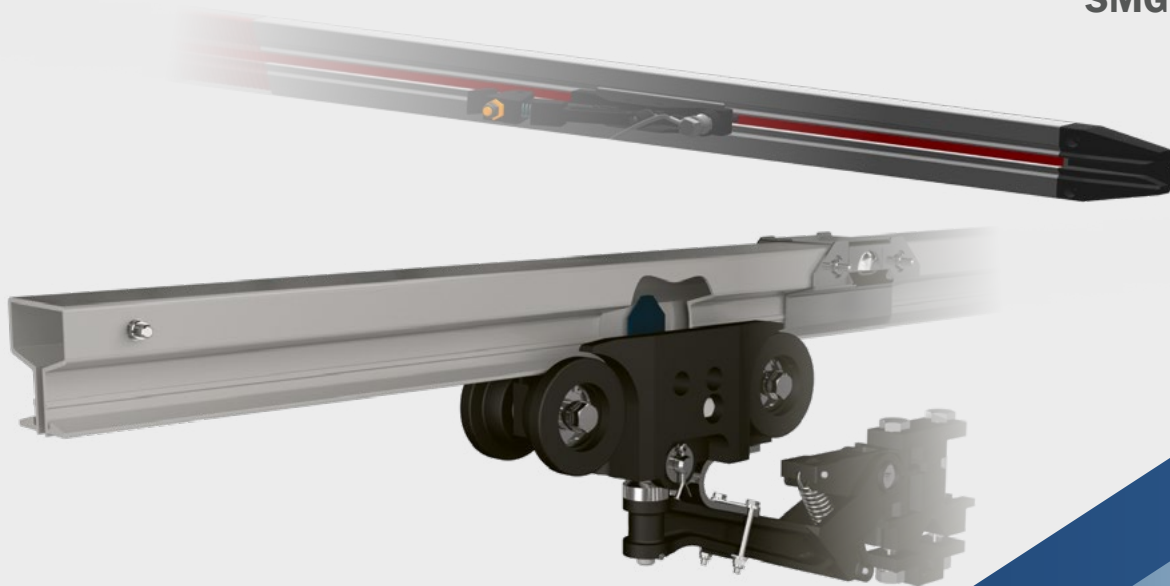

SMGM & SMGX

KEY HIGHLIGHTS


WIDE RANGE OF APPLICATIONS

With the vCOM product family for mobile data transmission, VAHLE serves indoor installations with the SMGM as well as outdoor installations with the SMGX. This product variety offers a selection for different segment lengths and mechanical tolerances.




STEADY SIGNAL QUALITY

Low-wear skids and a pressure spring provide a stable mechanical guide and steady immersion depth of the data coupler into the SMG profile, guaranteeing secure signals and data transmission quality even in curved stretches.

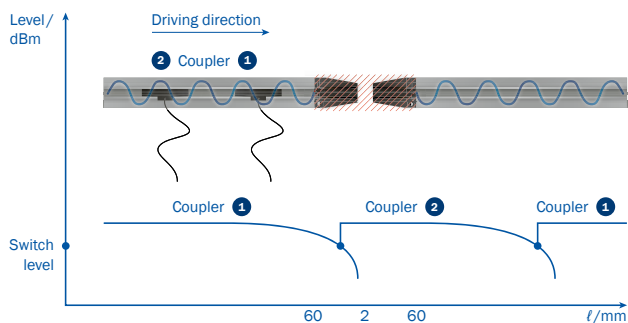


TRANSPARENT SYSTEM

Data transmission through SMGM occurs wirelessly within the SMG profile and no changes to the data occur during the transfer (packet-oriented). The SMGM interface does not require IP addresses.

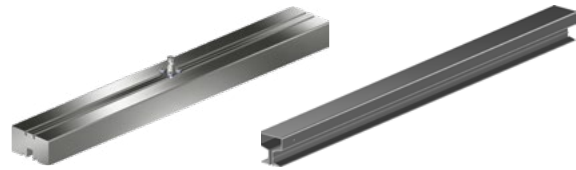


HF-SECURE

The SMG profile's interference-free design prevents signals from transmitting beyond the aluminum housing, allowing it to work alongside other industrial free radio systems. A radio license is not required. All HF components are factory tested and measured before each delivery, ensuring steady HF behavior.

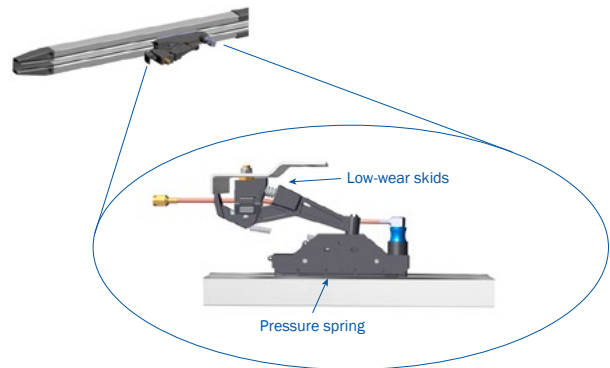

RELIABLE DATA TRANSMISSION

Connected data couplers ease segment transitions allowing for interruption-free data transmission. VAHLE's SMGM technology is suitable for use in people-safe applications.

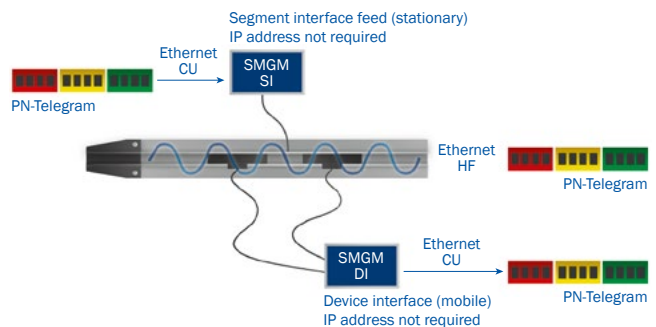

SMGM & SMGX

OPERATION


Modern production requires expansive volumes of data transmission for diagnosis and management. While this data is often transmitted for simple transport tasks in mobile applications via conductor lines with low transmission rates, this method of communication cannot stand up to the requirements of more complex applications that demand higher data rates. The data communication system SMGM (Slotted Microwave Guide Mini) was especially developed for these applications and enables the integration of fail-safe data transmission into proven VAHLE conductor systems.

The SMGM system is especially recommended for indoor applications, for example for EMS, skilnet and shuttle systems.

The SMGX system was developed on the basis of the SMGM system and is based on the same functional principle. The main difference lies in the mechanical components of the data rail and the matching mobile coupler. For robust and outdoor applications, for example crane systems and amusement rides, the SMGX "Slotted Microwaves Guide Extreme" is recommended.

FUNCTIONAL PRINCIPLE


The data transmission between the stationary management and the users on the mobile side occurs as locally restricted high frequency communication via slotted hollow conductor. The transmission path is divided into separately feeded segments due to the attenuation properties of the slotted hollow conductor mechanics. The maximum length of a segment is defined by the amount of users per segment and the used cable lengths. This is determined in the level calculation.

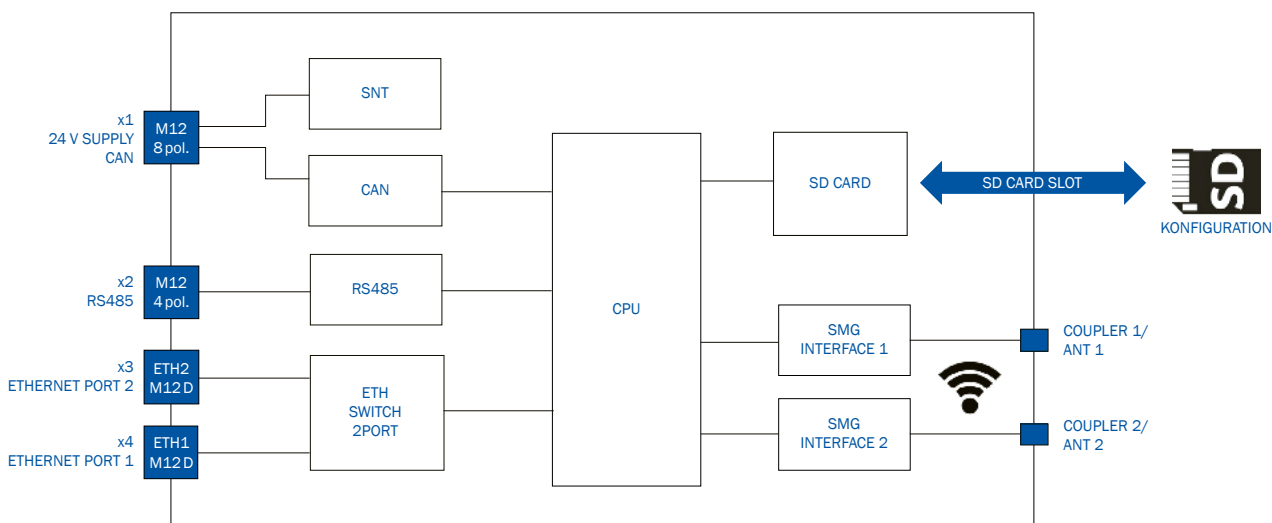


The vCOM interface has an Ethernet-based interface for connecting to the management (stationary side) and/or to the subordinate IO devices (mobile side). The SMGM and SMGX are optimized for both PROFINET-IO and PROFIsafe transmission.

SMGM

SYSTEM OVERVIEW

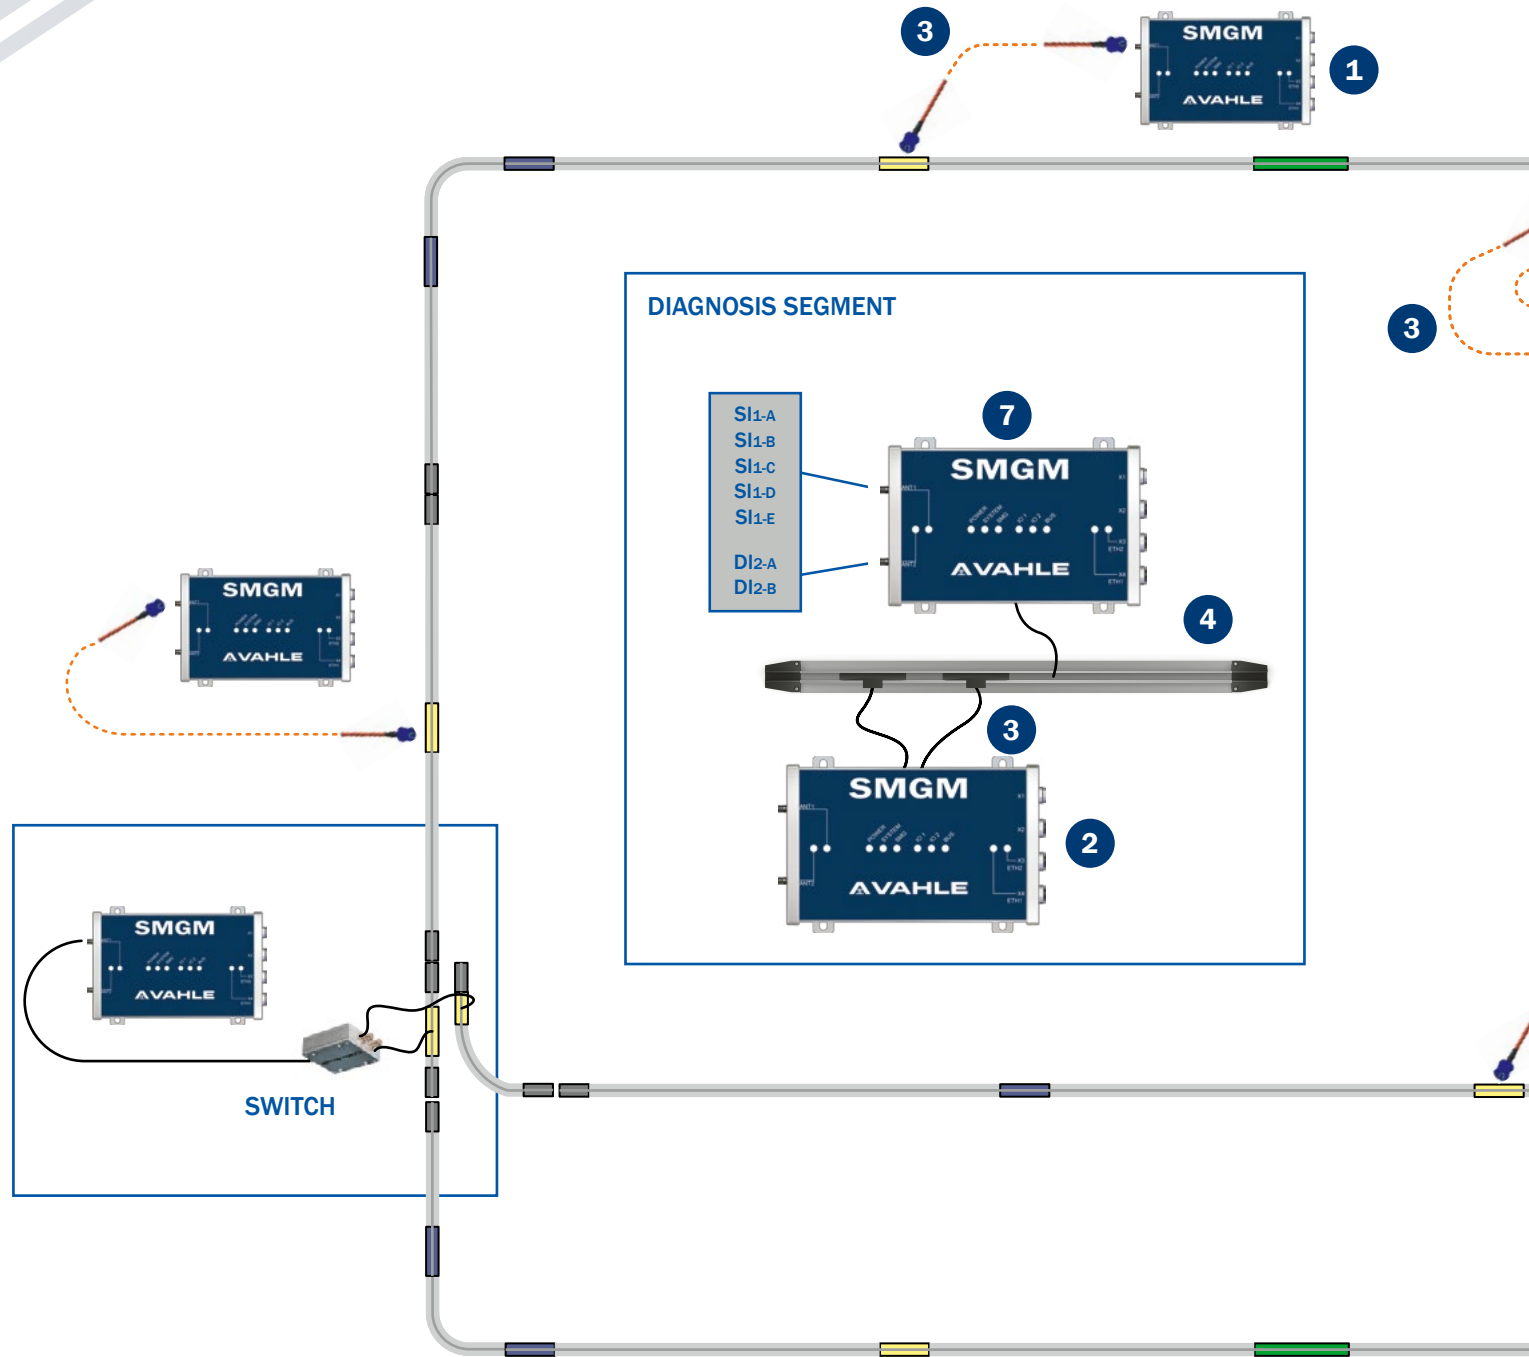

- 1 SMGM Stationary Segment Interface
- 2 SMGM Mobile Segment Interface
- 3 SMGM HF Cable
- 4 SMGM Profile
- 5 SMGM Track Change
- 6 SMGM Mobile Coupler
- 7 SMGM System Controller

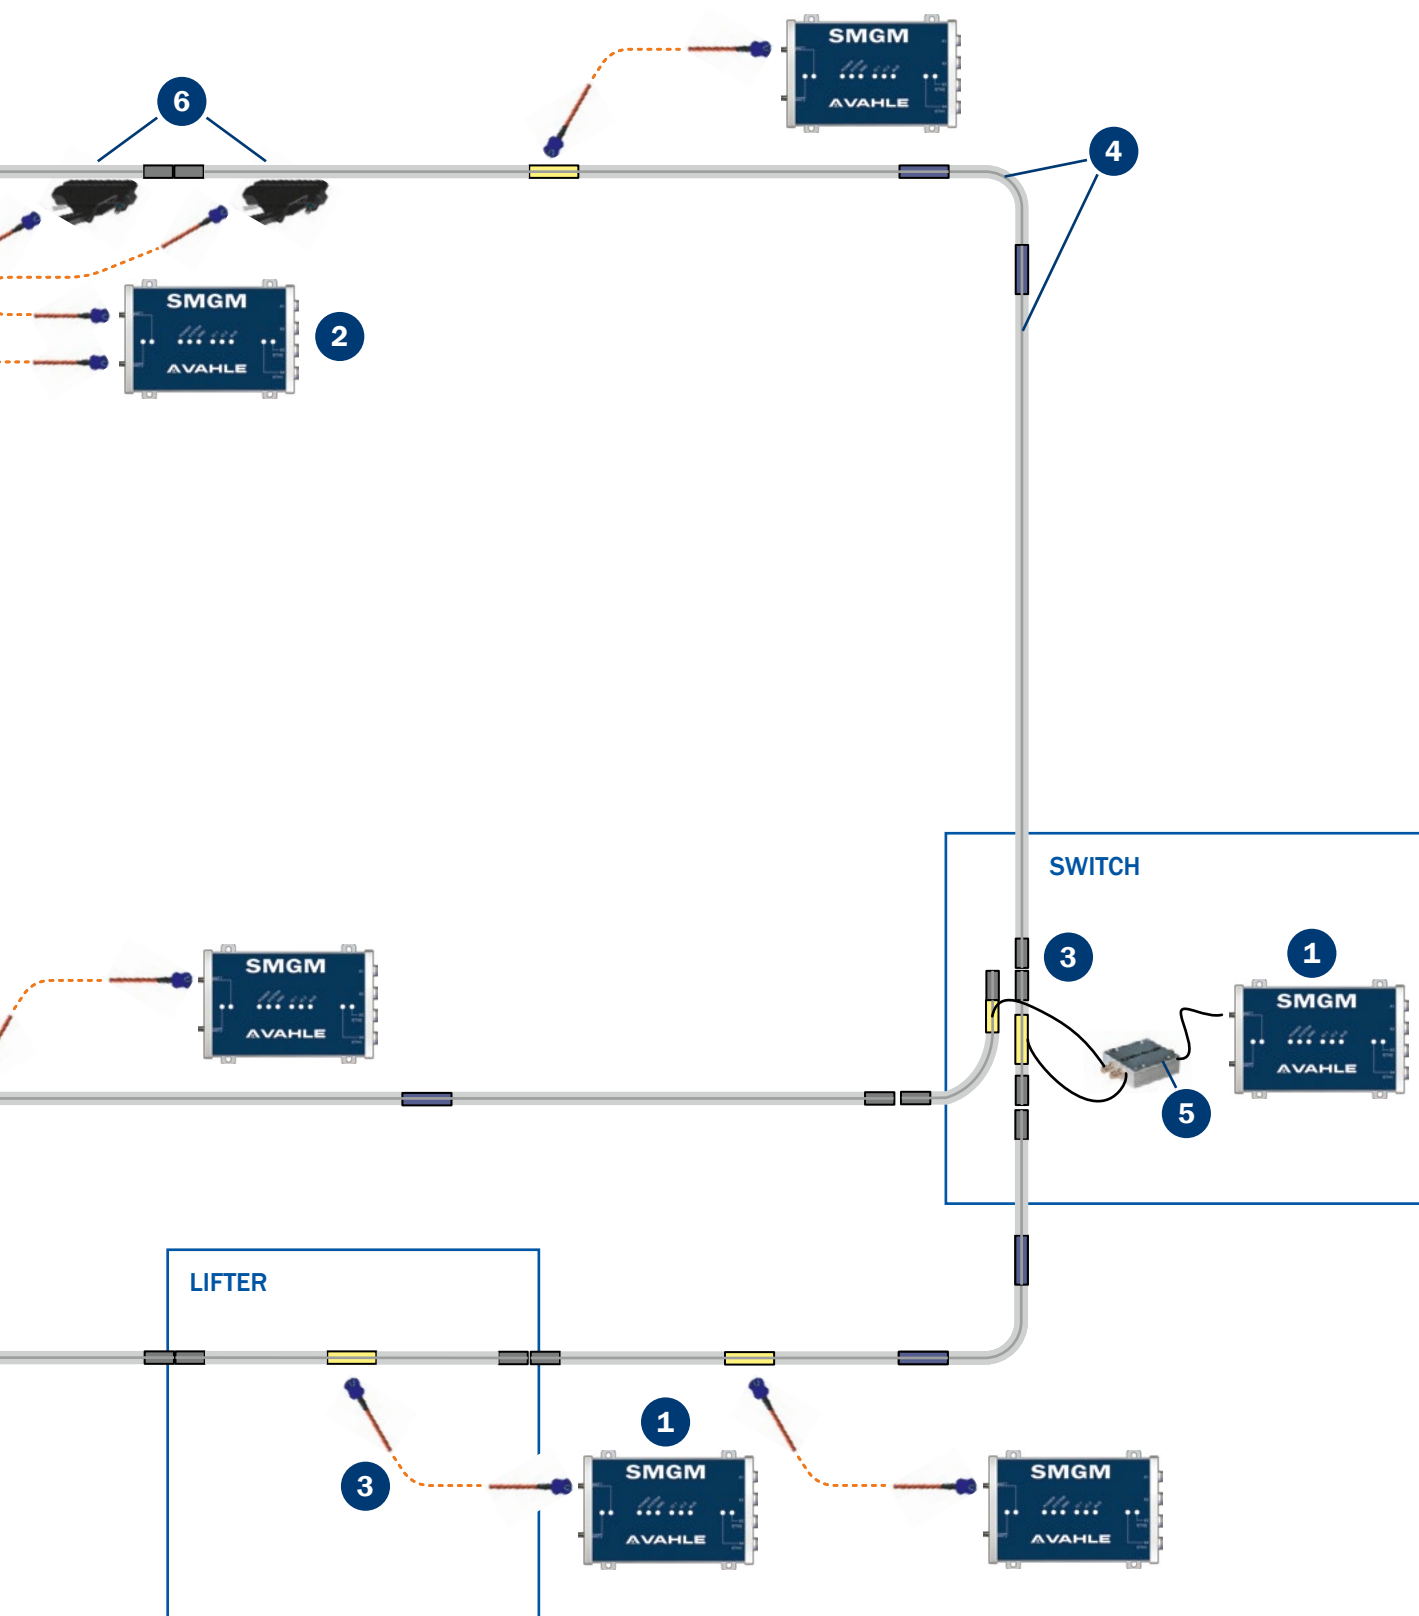


SMGM

DIAGNOSIS & SERVICE

COMPONENT & SYSTEM QUALITY SURVEILLANCE

All SMGM components are under surveillance via the system controller regarding their availability. If one of the components becomes inoperative, a respective prompt will be sent to the superordinate management component/controller.

For safe operation, compliance with different communication parameters (e.g. levels) is necessary. The stationary interface permanently monitors the compliance of these system-relevant parameters. If one of these parameters is not met, the system controllers receive an error message via Ethernet which is then forwarded to the superordinate management component/controller.

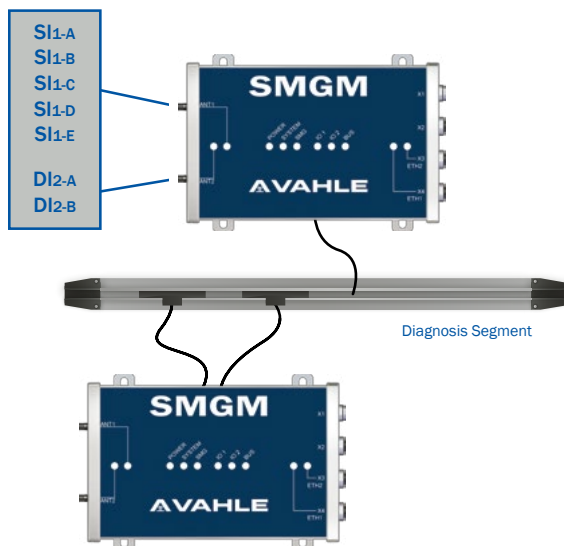


DIAGNOSIS SEGMENT

The diagnosis segment provides the opportunity of HF related diagnosis (communication/reception quality) of mobile SMGM interfaces and the associated data couplers. A mechanically and electrically separate SMG rail segment must be defined for this process.

SERVICE – REPLACEMENT CONCEPT

All parameters relevant for operation are saved on the SD card of the SMG interface. During replacement, simply insert the SD card of the defective module into the SD card slot of the universally usable replacement unit (SMG-RU). Module type and configuration are adopted via the SD card, without separate programming.

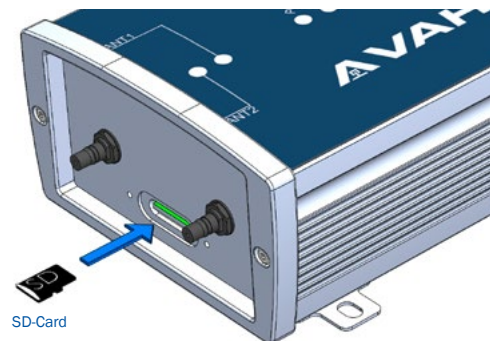


SMGM

SWITCH CONCEPT / SMGM-TC

SWITCH CONCEPT


For interruption-free communication, a stationary source interface HF signal is split at feed switches to both turnout segments via HF splitters.

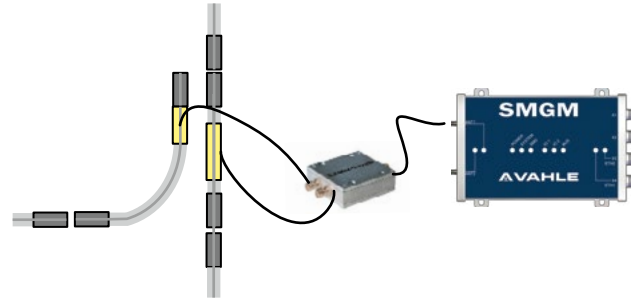

SMGX

SYSTEM OVERVIEW

- 1 SMGM Stationary Segment Interface
- 2 SMGM Mobile Segment Interface
- 3 SMGM HF Cable
- 4 SMGX Profile
- 5 SMGX Mobile Coupler

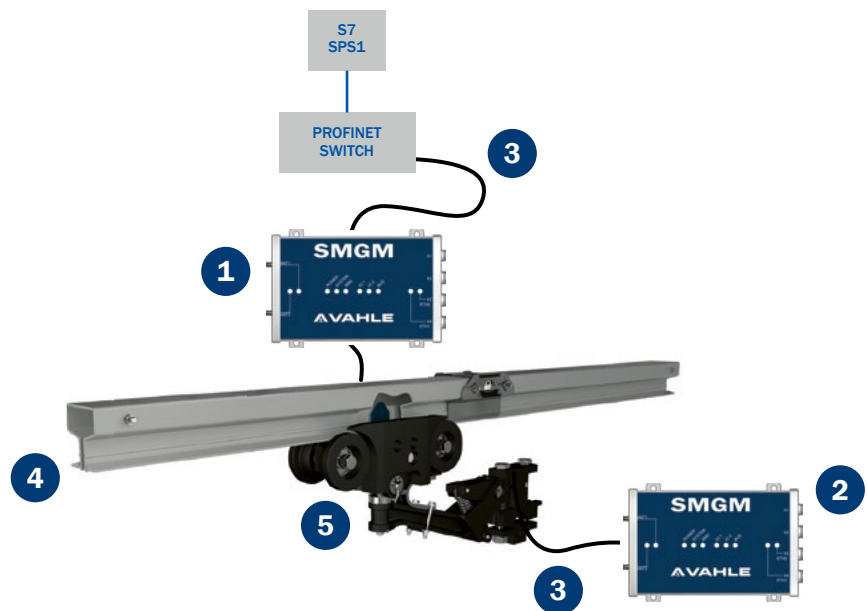

SMGM & SMGX

STATIONARY AND MOBILE INTERFACES

TECHNICAL DATA

ELECTRICAL DATA

Supply voltage 24 VDC ($\pm 10\%$)

Power consumption Max. 500 mA

Power input..... <12 W

Start-up time <4 s

ETHERNET INTERFACE

Data transmission..... 10 BASE-T, 100 BASE-TX

Data rate..... 100 Mbit/s (gross)

Switch functionality..... Dual-Port Switch

Max. cable length 100 m (depending on the cable type)

CONNECTIONS

Power supply 1 x M12, 8-pole, A-coded
(for BCC/SMGM-PN with system CAN-Bus)

Ethernet ports 2 x M12, 4-pole, D-coded

RS485 connection 1 x M12, 4-pole, A-coded

HF connections 2 x QLS

SD-Card..... SD-Card slot

AMBIENT CONDITIONS

Operating temperature 0° to 50 °C

Storage temperature..... -15° to 60 °C

MECHANICAL DATA

Protection type IP54

Vibration resistance 3M4 (EN60721-3-3)

Dimensions..... 183 x 118.3 x 63.4 mm

Weight 850 g




OPERATING CONDITIONS

Field of application..... Indoor (SMGM), indoor and outdoor (SMGX)

Speed..... Max. 180 m/min (SMGM), max. 130 m/min (SMGX)

Curves Only available for SMGM (radius horizontal min. 750 mm, vertical min. 2300 mm)

DIMENSIONS

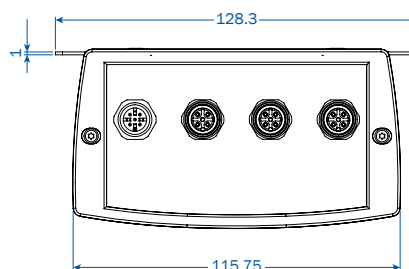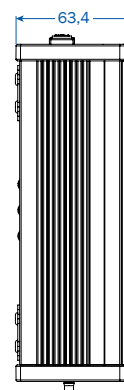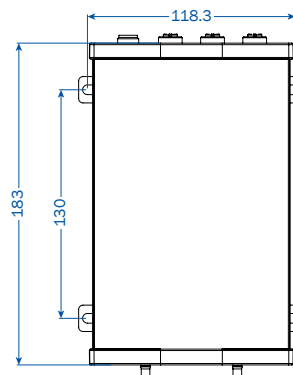

INFORMATION FOR USING INTERFACES

Only components of the same system can be used with each other. i. e. if the interface on the stationary side has “standard configuration”, the interface on the mobile side must also have “standard configuration.”

The stationary interface SMGM-SI-2 can only be used in conjunction with the BCC/SMGM-PN and a VAHLE DCS control. The SMGM-RU is a universal spare unit. It is the only interface that can adopt the configuration of any other interface.

SMGM & SMGX

STATIONARY AND MOBILE INTERFACES

SYSTEM TYPES



LITE-Interface



Standard/Advanced-Interface

LITE VERSION

The LITE version is applied in applications with one segment and up to four mobile users.

Application: Intralogistics

STANDARD VERSION

The Standard version is applied in applications with min. one segment and Up tp 15 mobile users.

Applications: Intralogistics, EMS and Skillet

ADVANCED VERSION

The Advanced version is applied in applications with one segment and up to three mobile users.

Applications: Intralogistics and EMS

| System | Lite | | Standard | | Advanced | | Cross-System | |
|---------------------------|------------------|------------------|-------------|-------------|-------------------|-----------------|--------------|------------|
| Stationary Interfaces | | | | | | | | |
| Description | SMGM-SI-1-LITE | | SMGM-SI-1 | SMGM-SI-2 | SMGM-SI-1-ADV | | SMGM-SC | SMGM-RU |
| No. of segments | 1 | | 1 | 2 | 1 | | 1 | * |
| Users per segment | 4 | | 15 | 15 | 3 | | 1 | * |
| Communication cycle | 16 m/s | | 16 m/s | 16 m/s | 8 / 16 m/s | | 16 m/s | * |
| Process data transmission | Yes | | Yes | Yes | Yes (prioritized) | | Yes | Yes |
| Video data transmission | No | | No | No | Yes | | No | Yes* |
| Mobile Interfaces | | | | | | | | |
| Description | SMGM-DI-ST1-LITE | SMGM-DI-ST2-LITE | SMGM-DI-ST2 | BCC/SMGM-PN | SMGM-DI-ST2-ADV | SMGM-DI-ST1-ADV | – | SMGM-RU |
| Transfer rate (gross) | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s | 100 Mbit/s |
| No. of mobile coupler | 1 | 2 | 2 | 2 | 2 | 1 | – | * |
| Process data transmission | Yes | Yes | Yes | Yes | Yes | Yes | – | Yes* |
| Video data transmission | No | No | No | No | Yes | Yes | – | Yes* |
| Max. Segment Length | | | | | | | | |
| Type | SMGX | SMGM | SMGM | SMGM | SMGM | SMGX | SMGM | * |
| Feed method L/2 | 200 m** | 180 m** | 120 m** | 120 m** | 140 m** | 500 m** | – | * |
| No. of mobile users | 4 | 4 | 15 | 15 | 3 | 3 | – | * |
| No. of mobile couplers | 1 | 2 | 2 | 2 | 2 | 1 | – | * |

* The properties of the SMGM-RU (Replacement Unit) depend on the configuration.

** Segment length depends on the number of mobile couplers and the used HF cables

SMGM & SMGX


STATIONARY INTERFACES

RANGE OF PRODUCTS

| Description | | System | Order No. |
|----------------|--|--------------|-----------|
| SMGM-SI-1-LITE | Segment Interface for one segment and max. four users | LITE | 10014867 |
| SMGM-SI-1 | Segment Interface for one segment and max. 15 users | Standard | 10011066 |
| SMGM-SI-2 | Segment Interface for two segments and max. 15 users | Standard | 10011064 |
| SMGM-SI-1-ADV | Segment Interface for one segment with ADV Configuration | Advanced | 10016752 |
| SMGM-SC | System Controller | Cross-System | 10011071 |
| SMGM-RU | Replacement Unit | * | 10015129 |

SMGM & SMGX

MOBILE INTERFACES



BCC-Interface

RANGE OF PRODUCTS

| Description | | System | Order No. |
|------------------|---|----------|-----------|
| SMGM-DI-ST1-LITE | Device Interface LITE for one mobile coupler | LITE | 10014897 |
| SMGM-DI-ST2-LITE | Device Interface LITE for two mobile couplers | LITE | 10014866 |
| SMGM-DI-ST2 | Device Interface Standard for two mobile couplers | Standard | 10011069 |
| BCC/SMGM-PN | Communication Interface Profinet Bus Center Control | Standard | 10011679 |
| SMGM-DI-ST1-ADV | Device Interface Advanced for one mobile coupler | Advanced | 10016753 |
| SMGM-DI-ST2-ADV | Device Interface Advanced for two mobile couplers | Advanced | 10016755 |
| SMGM-RU | Replacement Unit | * | 10015129 |

* The properties of the SMGM-RU (Replacement Unit) depend on the configuration.

SMGM & SMGX

CABLES



Cable Ecoflex



Cable RG316D

RANGE OF PRODUCTS:

<5 M LENGTH

| Description | Length | Order No. |
|---|---------|-----------|
| Connection cables Plug 0° to 0° | | |
| SMGM-VL-500-QLS-QLS-RG316D | 500 mm | 10011177 |
| SMGM-VL-1000-QLS-QLS-RG316D | 1000 mm | 10012478 |
| SMGM-VL-1500-QLS-QLS-RG316D | 1500 mm | 10012771 |
| SMGM-VL-2000-QLS-QLS-RG316D | 2000 mm | 10012320 |
| SMGM-VL-3000-QLS-QLS-RG316D | 3000 mm | 10012477 |
| Connection cables Plug 90° to 0° | | |
| SMGM-VL-500-QLS90-QLS-RG316D | 500 mm | 10009405 |
| SMGM-VL-1000-QLS90-QLS-RG316D | 1000 mm | 10009406 |
| SMGM-VL-1500-QLS90-QLS-RG316D | 1500 mm | 10011834 |
| SMGM-VL-2000-QLS90-QLS-RG316D | 2000 mm | 10009407 |
| SMGM-VL-2500-QLS90-QLS-RG316D | 2500 mm | 10014682 |
| SMGM-VL-3000-QLS90-QLS-RG316D | 3000 mm | 10009408 |
| SMGM-VL-4500-QLS90-QLS-RG316D | 4500 mm | 10022375 |
| SMGM-VL-5000-QLS90-QLS-RG316D | 5000 mm | 10009409 |

RANGE OF PRODUCTS:

BCC/SMGM TO DCS CONTROL SYSTEM

| Description | Length | Order No. |
|-----------------------|---------|-----------|
| Cable DCS/BCC – 0.5 m | 500 mm | 10012475 |
| Cable DCS/BCC – 1.0 m | 1000 mm | 10012307 |
| Cable DCS/BCC – 1.5 m | 1500 mm | 10012476 |
| Cable DCS/BCC – 2.0 m | 2000 mm | 10012308 |
| Cable DCS/BCC – 2.5 m | 2500 mm | 10012213 |
| Cable DCS/BCC – 3.0 m | 3000 mm | 10012479 |

SMGM & SMGX

CABLES

RANGE OF PRODUCTS: <5M LENGTH


| Description | Length | Order No. |
|---|---------|-----------|
| Extension cables Plug N-socket to N-socket | | |
| SMG-VL-1000-NB-NB-ECOFLEX15 | 1000 mm | 10011174 |
| SMG-VL-1500-NB-NB-ECOFLEX15 | 1500 mm | 10014681 |
| SMG-VL-2000-NB-NB-ECOFLEX15 | 2000 mm | 10011175 |
| SMG-VL-2500-NB-NB-ECOFLEX15 | 2500 mm | 10011510 |
| SMG-VL-3000-NB-NB-ECOFLEX15 | 3000 mm | 10011512 |
| SMG-VL-4000-NB-NB-ECOFLEX15 | 4000 mm | 10011511 |
| SMG-VL-5000-NB-NB-ECOFLEX15 | 5000 mm | 10012879 |
| SMG-VL-5500-NB-NB-ECOFLEX15 | 5500 mm | 10022036 |
| SMG-VL-7000-NB-NB-ECOFLEX15 | 7000 mm | 10011838 |
| Extension cables Plug 90° to N-socket | | |
| SMGM-VL-500-QLS90-N-RG316D | 500 mm | 10011171 |
| SMGM-VL-750-QLS90-N-RG316D | 750 mm | 10011567 |
| SMGM-VL-1000-QLS90-N-RG316D | 1000 mm | 10008185 |
| SMGM-VL-1500-QLS90-N-RG316D | 1500 mm | 10011192 |
| SMGM-VL-2000-QLS90-N-RG316D | 2000 mm | 10011172 |
| SMGM-VL-2500-QLS90-N-RG316D | 2500 mm | 10011509 |
| SMGM-VL-3000-QLS90-N-RG316D | 3000 mm | 10011173 |
| Extension cables Plug 0° to N-socket | | |
| SMGM-VL-500-QLS-N-RG316D | 500 mm | 10011176 |
| SMGM-VL-750-QLS-N-RG316D | 750 mm | 10011568 |
| SMGM-VL-1000-QLS-N-RG316D | 1000 mm | 10012839 |
| SMGM-VL-1500-QLS-N-RG316D | 1500 mm | 10014148 |

SMGM & SMGX

PROFILE



SMGM-Profile

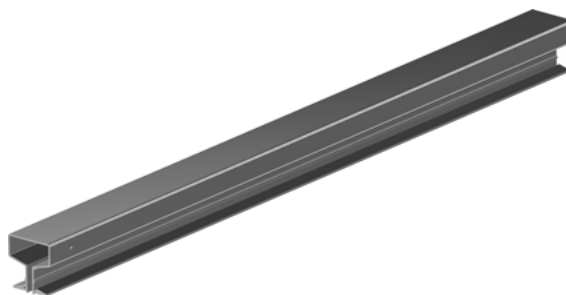

SMGX-Profile

RANGE OF PRODUCTS

| Description | Order No. |
|--------------------------------|-----------|
| SMGM-Profile incl. accessories | P9999996* |
| SMGX-Profile incl. accessories | P9999996* |

SMGM & SMGX

PROFILE SUPPORT



SMGM-Solo-Hanger



SMGX-Hanger
incl. mounting rail

RANGE OF PRODUCTS

| Description | Max. support distance | Order No. |
|------------------|-----------------------|-----------|
| SMGM-Solo-Hanger | 1.5 m | 10010543 |
| SMGX-Hanger | 2.0 m | 10016900 |


* It is a matter of a pseudo order number. Our Techsales will check the profile components in detail by ordering.

SMGM & SMGX

FUNNEL



SMGM-Funnel

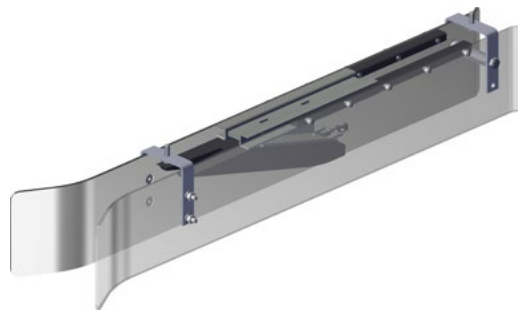

SMGX-Funnel

RANGE OF PRODUCTS

| Description | Order No. |
|------------------|-----------|
| SMGM-Solo-Funnel | 10016778 |
| SMGX-Funnel | 10017003 |

SMGM & SMGX

MOBILE COUPLER



SMGM-Coupler



SMGX-Coupler

RANGE OF PRODUCTS

| Description | Tolerances | Order No. |
|---------------------------------|------------------------|-----------|
| SMGM-ANTFE-SAMK | ±15 mm | 10019562 |
| SMGM-ANTFE-SAML | ±20 mm | 10024386 |
| SMGM Support for mobile coupler | - | 10011961 |
| SMGX-SA-UT-011-PH-R | ±45 mm ↓ ±60 mm ↗ | 10012179 |

SMGM

TRACK CHANGE



RANGE OF PRODUCTS


| Description | Order No. |
|---------------------------------|-----------|
| SMGM-Track Change (HF-Splitter) | 10014524 |

SMGM

SYSTEM INTEGRATION

EXAMPLE: EMS APPLICATION*

- 1 In this application, the SMGM profile is mounted between the APOS optic Datamatrix Code Strip and U10 profile as part of the EMS profile.
- 2 The SMGM mobile coupler is integrated between the APOS Optic reading head and the U10 current collector.
- 3 A special bracket provides a common mounting plate for the APOS Optic reading head, the U10 current collector and also for the SMGM mobile coupler.

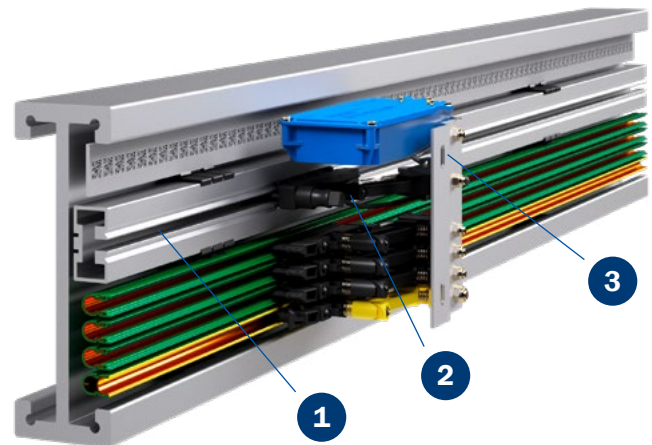

* More system combinations are available on request, please contact our Techsales in case of need. Please take into account that the EMS components are not part of VAHLE delivery scope.



VAHLE Incorporated.
407 Cane Island Pkwy.
Katy, TX 77494

Tel.: 713-465-9796
Fax: 713-465-1851
E-Mail: salesinbox@vahleinc.com

www.vahleinc.com

FOLLOW US @VAHLEINC

