
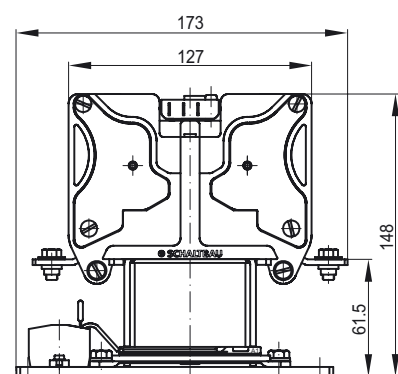
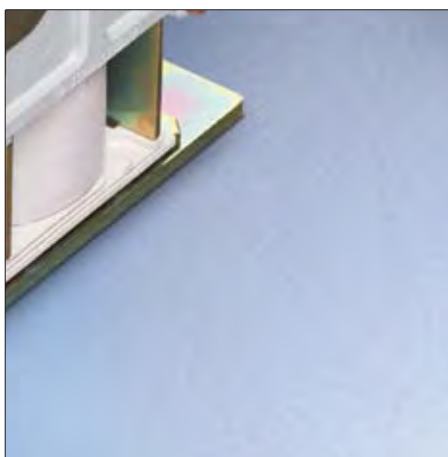


Double-pole NO contactor C295 Series

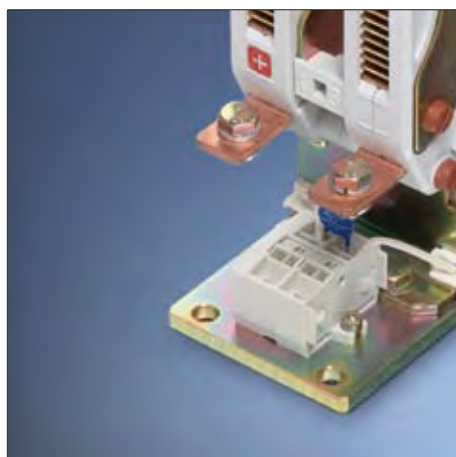

Double-pole NO contactor, C295 Series

Compact double-pole high-voltage NO contactor for DC and AC operation: With its compact size and efficient arc chute our C295 Series contactor allows the handling of voltages up to 1,500 V and currents of 120 A max. Switch-

ing high amperage even at significant inductance can be achieved by series connection of the main contacts, whereas parallel connection results in longer contact life.

Features

- Compact in size
- Double-break contacts
- With magnetic blowout for DC arc quenching
- Switching of high inductive loads by means of main contacts connected in series
- Parallel connection: Longer life of main contacts

Applications

Typical applications are to be found in traffic engineering equipment, particularly in heating circuits, air conditioning equipment and conversion engineering of complex power supplies.

Standard

Meet requirements for industrial applications to:

IEC 60947-1 Low-voltage switchgear and controlgear - Part 1: General rules

IEC 60947-4-1 Low-voltage switchgear and controlgear - Part 4-1: Contactors and motor starters - Electromechanical contactors and motor starters.

Meet requirements for railway applications to:

IEC 60077-1, Railway applications - Electric equipment for rolling stock - Part 1: General service conditions and general rules.

IEC 60077-2, Railway applications - Electric equipment for rolling stock - Part 2: Electrotechnical components; General rules



C295 Series double-pole NO contactor

Ordering code

Example: **C295 A/P/ 24EV-U2**

Series

Version

A	U _n 750 V DC
B	U _n 750 V AC*
K	U _n 1,200 V DC
L	U _n 1,200 V AC*
S	U _n 200 V DC } no splitters
T	U _n 200 V AC* }

Polarity of main contacts

G	for series connection	[+ —]
P	for parallel connection	[+ —]
X	AC*, no polarization	

Coil voltage

24 / 36 / 48 / 60 / 72 / 96 / 110 V DC

Coil tolerance

E	-30 % ... +25 %
B	magnetically latching version -30 % ... +25 %

Coil suppression

V	Varistor
---	----------

Auxiliary contacts

U2	2x snap-action switch S870 W1D1 a 012, standard
I2	2x snap-action switch S870 W1D4 a 012, gold-plated contacts

* Types for AC operation are without permanent-magnetic blowout

Note:

Presented in this catalogue are only stock items that can be supplied in short delivery time.


Special variant

If you need a special variant feel free to contact us. Maybe the type of contactor you are looking for is among our many **special designs**. If not, we can also supply customized designs. In this case, however, minimum order quantities apply.


Circuit and dimension diagrams, Mounting

Circuit diagrams:

- **Polarity G** for series connection




- **Polarity P** for parallel connection




- **Polarity X**, no polarization for AC operation (no diagram)

Mounting holes:

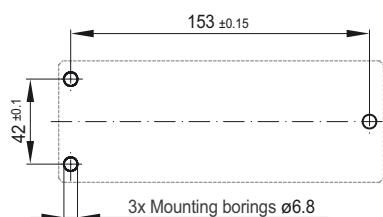

Dimension diagram:

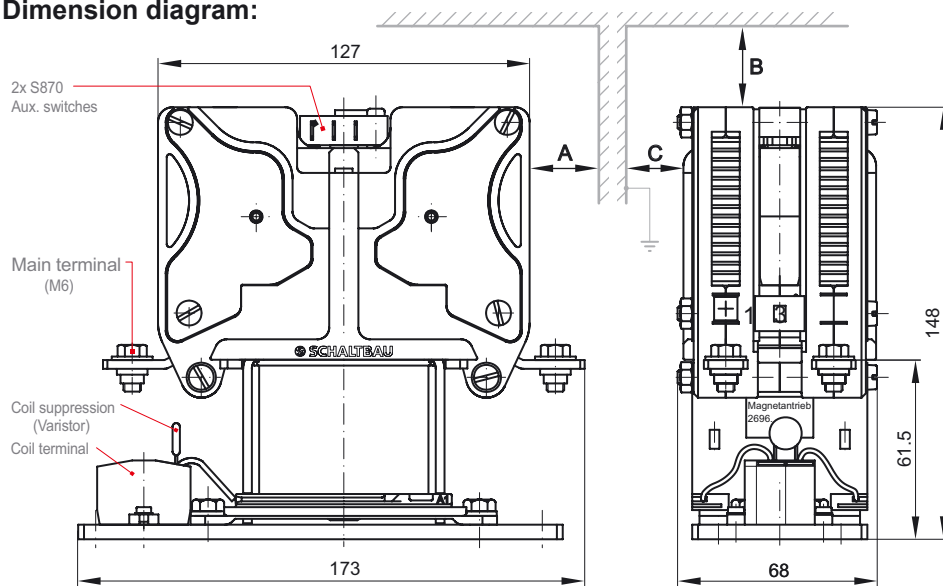

Note: Observe clearance of at least 10 mm towards live or earthed parts!
Reduced scale diagrams / dimensions in mm

Clearance towards plasma exit (see diagram):	A	B	C
P < rated power	20 mm	15 mm	10 mm
P ≥ rated power	30 mm	20 mm	15 mm

Specifications

C295 Series, Version	I	A	I	B	I	K	I	L	I	S	I	T
Type of voltage	DC		AC		DC		AC		DC		AC	
Main contacts (number, configuration)	2x SPST-NO											
Nominal voltage U_n	750 V DC		750 V AC		1,200 V DC		1,200 V AC		200 V DC		200 V AC	
Rated insulation voltage U_i	1,000 V		1,000 V		1,600 V		1,600 V		1,000 V		1,000 V	
Pollution degree	PD3		PD3		PD3		PD3		PD3		PD3	
Overvoltage category	OV3		OV3		OV3		OV3		OV3		OV3	
Conventional thermal current I_{th} of individual contact, for wire cross-section 50 mm ² at $T_a = 70^\circ\text{C}$,	120 A		120 A		120 A		120 A		120 A		120 A	
Making capacity, resistive, $T = 0$ ms	1,000 A		1,000 A		1,000 A		1,000 A		1,000 A		1,000 A	
Breaking capacity	1,000 V DC, L/R 1 ms: 90 A L/R 15 ms: 25 A		1,000 V AC, $\cos\phi$ 1.0: 140 A		1,500 V DC, L/R 1 ms: 60 A L/R 15 ms: 25 A		1,500 V AC, $\cos\phi$ 1.0: 40 A		220 V DC, L/R 1 ms: 1,200 A L/R 15 ms: 800 A		---	
Main contacts Contact material Main terminals	AgSnO ₂ M6, tightening torque 6 Nm max.											
Auxiliary contacts Number, Configuration Utilization category Terminals, Flat quick connect	2x snap-action switch S870, SPDT, optional (see catalogue D70) AC-15: 1.5 A at 230 V AC; DC-13: 0.5 A at 60 V DC; DC-13: 2 A at 24 V DC 6.3 x 0.8 mm											
Magnetic drive Rated control supply voltage U_s Operating range of U_s Coil power dissipation ($T_a = 20^\circ\text{C} / U_s$) Coil suppression Coil terminals	24 / 36 / 48 / 60 / 72 / 96 / 110 V DC -30 % ... +25 % U_s at $T_a = 70^\circ\text{C}$ max. cold coil approx. 27 W / warm coil approx. 13.5 W Varistor Cage clamp											
Degree of protection	IP20, terminals and lower splitter plate IP00											
Mechanical endurance	> 3 x 10 ⁶ operating cycles											
Electrical endurance	> 400,000 cycles ($U_n = 700$ V DC, $I_{th} = 70$ A, L/R = 1 ms, parallel connection)											
Shock / Vibration (IEC 61373)	5 g (30 ms half sinus) / Class B, Cat. 1: 5 ... 150 Hz											
Mounting position	Any, except: do not mount upside down											
Temperature Operating temperature Storage temperature	-25 °C ... +70 °C -40 °C ... +80 °C											
Weight	2.8 kg		2.8 kg		2.8 kg		2.8 kg		2.6 kg		2.6 kg	



Schaltbau GmbH
manufactures in
compliance with
RoHS.



Schaltbau GmbH
has an environment
management system
that has been certified
since 2002.



Schaltbau GmbH
has a quality manage-
ment system that has
been certified since
1994.

Electrical Components and Systems for Railway Engineering and Industrial Applications

Connectors

- Connectors manufactured to industry standards
- Connectors to suit the special requirements of communications engineering (MIL connectors)
- Charging connectors for battery-powered machines and systems
- Connectors for railway engineering, including UIC connectors
- Special connectors to suit customer requirements

Snap-action switches

- Snap-action switches with positive opening operation
- Snap-action switches with self-cleaning contacts
- Enabling switches
- Special switches to suit customer requirements

Contactors

- Single and multi-pole DC contactors
- High-voltage AC/DC contactors
- Contactors for battery powered vehicles and power supplies
- Contactors for railway applications
- Terminal bolts and fuse holders
- DC emergency stop switches
- Special contactors to suit customer requirements

Control devices

- Master controllers and reversers for railway applications
- Toggle switch devices
- Handles and foot switches for railway applications (dead-man equipment)
- Switching elements with high breaking capacity
- Emergency brake handles
- Signal devices

Transportation system equipment

- Power supplies for passenger coaches (electric equipment)
- Battery chargers for locomotives and passenger coaches
- High-voltage equipment for single and multi-phase operation
- Heating devices and heating controls
- Design and engineering services for high-voltage equipment
- Special equipment to suit customer requirements

Schaltbau GmbH

Hollerithstrasse 5
81829 Munich
Germany

Phone +49 89 9 30 05-0
Fax +49 89 9 30 05-350
e-Mail contact@schaltbau.de
Internet www.schaltbau.com

with compliments: