



Pavone Sistemi
pesatura elettronica industriale

LOAD CELLS

off center

CB17



Low capacity, high accuracy at a competitive price

Capacities from 0.6 to 3 Kg

IP64 Protection

Platform maximum size of 200 x 200 mm

Particularly suitable for the construction of small scales

TECHNICAL CHARACTERISTICS CB17

Rated load (RL):	600 g, 1, 2, 3 kg
Linearity:	< $\pm 0.02\%$ R.O.
Repeatability:	< $\pm 0.02\%$ R.O.
Creep (20 minutes):	< $\pm 0.02\%$ R.L.
Safe overload:	300% of R.L.
Ultimate overload:	400% R.L.
Recommended input:	5 $\div$ 12 Vdc/Vac
Maximum excitation:	15 Vdc/Vac
Input resistance:	420 +30 -20 Ohm
Output resistance:	350 $\pm$ 5 Ohm
Insulation resistance:	> 2000 M Ohm
Rated output (R.O.):	1 $\pm$ 0.1 mV/V
Zero balance:	< $\pm 0.05\%$ of R.O.
Temperature range:	-10 $\div$ +50 °C
Compensated temperature range:	-10 $\div$ +50 °C
Temperature effect on zero balance:	< $\pm 0.004\%$ of R.O./°C
Temperature effect on output:	< $\pm 0.0012\%$ on output/°C
Degree of protection:	IP64
Material:	Aluminum alloy
Electrical connection:	4 conductors shielded cable; length 40 cm







Pavone Sistemi
pesatura elettronica industriale

LOAD CELLS

off center

CB17

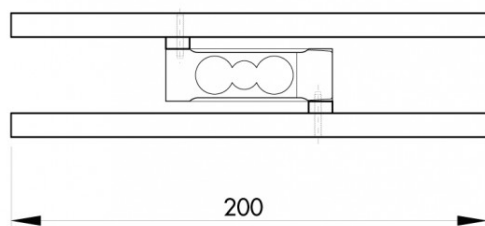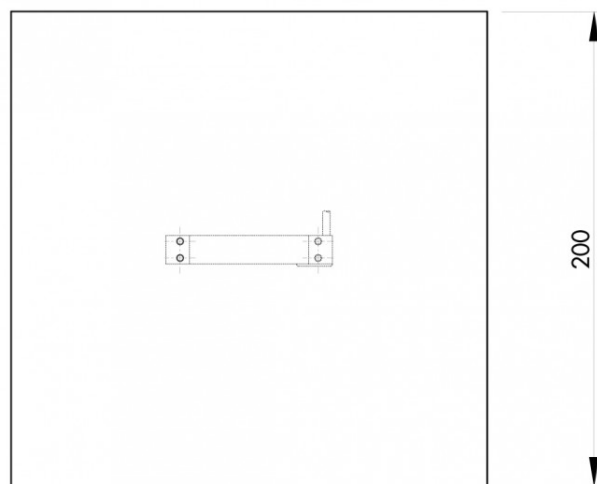

Electrical Connection	
+Excitation	Red
-Excitation	White
+Signal	Green
-Signal	Blue
Shield	Cable shield
Error is within 0.02% SN applied with 1/2 of capacity at the position of 50mm of eccentricity	
The center of loading plate and the center of the load cell should be the same position	





Pavone Sistemi
pesatura elettronica industriale

LOAD CELLS

off center

CB17

