

High Frequency SineWave Guardian™

Optimized for
High Frequency
Motors

New best-in-class SineWave Filter
optimized for high frequency
motors out to 15,000 ft



- **Increases motor life**
- **Easy to integrate, install and service**
- **Operates in high ambient temperatures**
- **High performance and reliability**
- **Three-year warranty**

If you're not leading, you're following. Innovation is here.

At MTE, we have found a way to make our best-in-class motor protection solution, the SineWave Guardian™ Filter, even better. Featuring the same unequalled performance, the market leading High Frequency SineWave Guardian™ uses innovative technology to optimize protection for high frequency motors. Our new filter features reduced voltage drop and virtually eliminates voltage distortion (THVD) generated by Variable Frequency Drives (VFDs). This results in reduced losses, protection against overheating motors, and ultimately providing less downtime. It can protect motors in some of the harshest conditions, with unmatched reliability and durability. The High Frequency SineWave Guardian Filter is the optimized motor protection solution for high frequency motors, exclusively by MTE.

High Frequency SineWave Guardian™ Filters transform the output of Variable Frequency Drives (VFDs) to a near perfect sinusoidal waveform for the best level of protection for high frequency motors. MTE's unique, patent-pending design comes in a smaller size than traditional LC Filters, and offers higher performance and better efficiency.

Increase motor life: Reduce motor heating through reduction of high frequencies associated with VFD output and also reduce motor insulation stress through reduction of motor peak voltages.


Reduce motor audible noise: Reduce audible noise through reducing high frequencies associated with VFD output.

Reduce radiated emissions: Reduce emissions through reducing high frequencies associated with VFD output.


High Frequency SineWave Guardian™




Application Configurations:

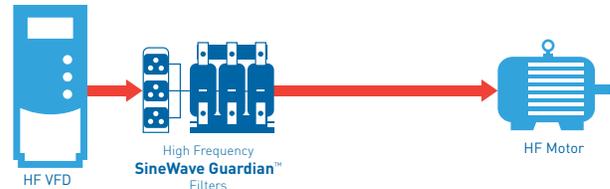

Extreme Long Lead to Motor

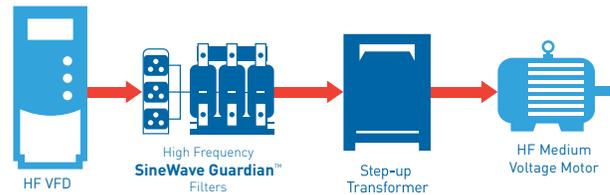


Long Lead with Step-up Transformer

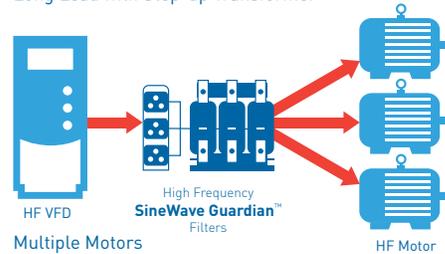


Multiple Motors

High Frequency SineWave Guardian Performance:



Without High Frequency SineWave Guardian



With High Frequency SineWave Guardian

The High Frequency SineWave Guardian is a sinewave filter which protects high frequency motors from damage by "cleaning" the sinewave waveform that is generated by the Variable Frequency Drive.

Performance Specifications	
Service Load Condition	Conventional 3 phase motors Standard step-up transformer
Input Voltage	380V - 480V +/- 10%
Current Range	80A - 600A (60 HP - 500 HP)
Harmonic Voltage Distortion	5% maximum @ 5kHz; 8% maximum @ 6-8 kHz
Inverter Switching Frequency	4.8kHz to 8kHz
Inverter Operating Frequency	6Hz to 300Hz
Maximum Ambient Temperature	-40C to +60C modular filter; -40C to +90C storage
Insertion Loss (Voltage)	6% maximum @ 150Hz; 12% maximum @ 300Hz
Efficiency	>99%
Altitude Without Derating	3,300 feet above sea level
Maximum Motor Lead Length	15,000 feet
Relative Humidity	0% to 95% non-condensing
Current Rating	100% RMS continuous; 150% for 1 minute intermittent

Final product specifications subject to change at anytime.



MTE Corporation
N83 W13330 Leon Road
Menomonee Falls WI 53051
(800) 455-4MTE • (262) 253-8200

