


Amsted HD Split Wedge

Economical choice for mid to low utilized assets

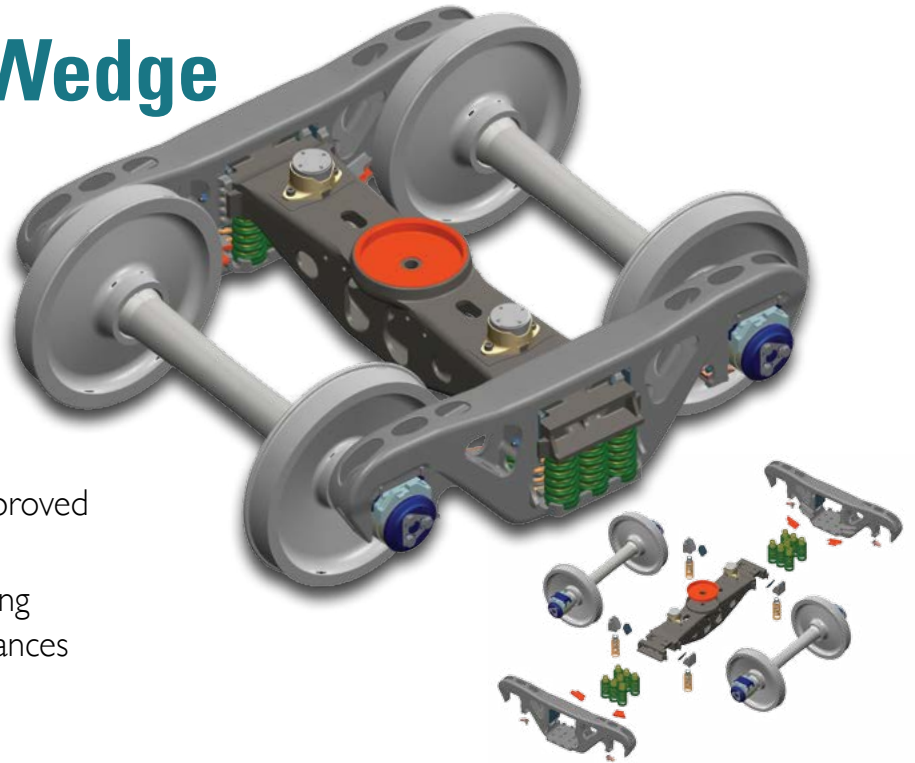


- Variable damped bogie
- Equipped with split wedge damping
 - Provides adequate stability
 - Keeps bogie square
- Adapter Plus® steering pad provides improved wheel and bearing life
- Features Amsted Rail's proprietary casting process for less weight and tighter tolerances
- Up to 286,000 pound Gross Rail Load/
32.5 tonne Axle Load

AMSTED HD SPLIT WEDGE COMMON CONFIGURATIONS

Designation	Track Gauge	Journal Size	Axle Load	Wheel Diameter	Wheel Base	Center Bowl	Spring Type	Additional Description
AB-7974	1067mm	6 ½ X 9	32.5t	914mm 36"	1778mm 70"	356mm 14"	AAR	LOW PROFILE FRAME WITH SPLIT WEDGE
AB-7977	1435mm	6 ½ X 12	30t	914mm 36"	1778mm 70"	406mm 16"	AAR	BOGIE WITH SPLIT WEDGE
AB-9037	1435mm	7 X 12	35.7t	965mm 38"	1829mm 72"	406mm 16"	AAR	BOGIE WITH STANDARD WEDGE

A world apart in reliability **Amsted Rail**

**Amsted Rail, the global leader
in fully integrated freight car systems
for the heavy haul rail market.**

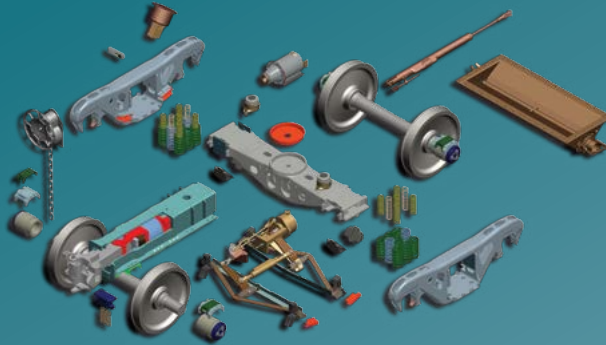

Amsted Rail has been an industry leader in freight railroading for more than 100 years. Our experience, dedication and efficiency in servicing today's demanding heavy haul operations is unequalled as we keep railcars rolling in some of the world's toughest railroad environments. To learn more, visit www.amstedrail.com.

A world apart in reliability **Amsted Rail**[®]