
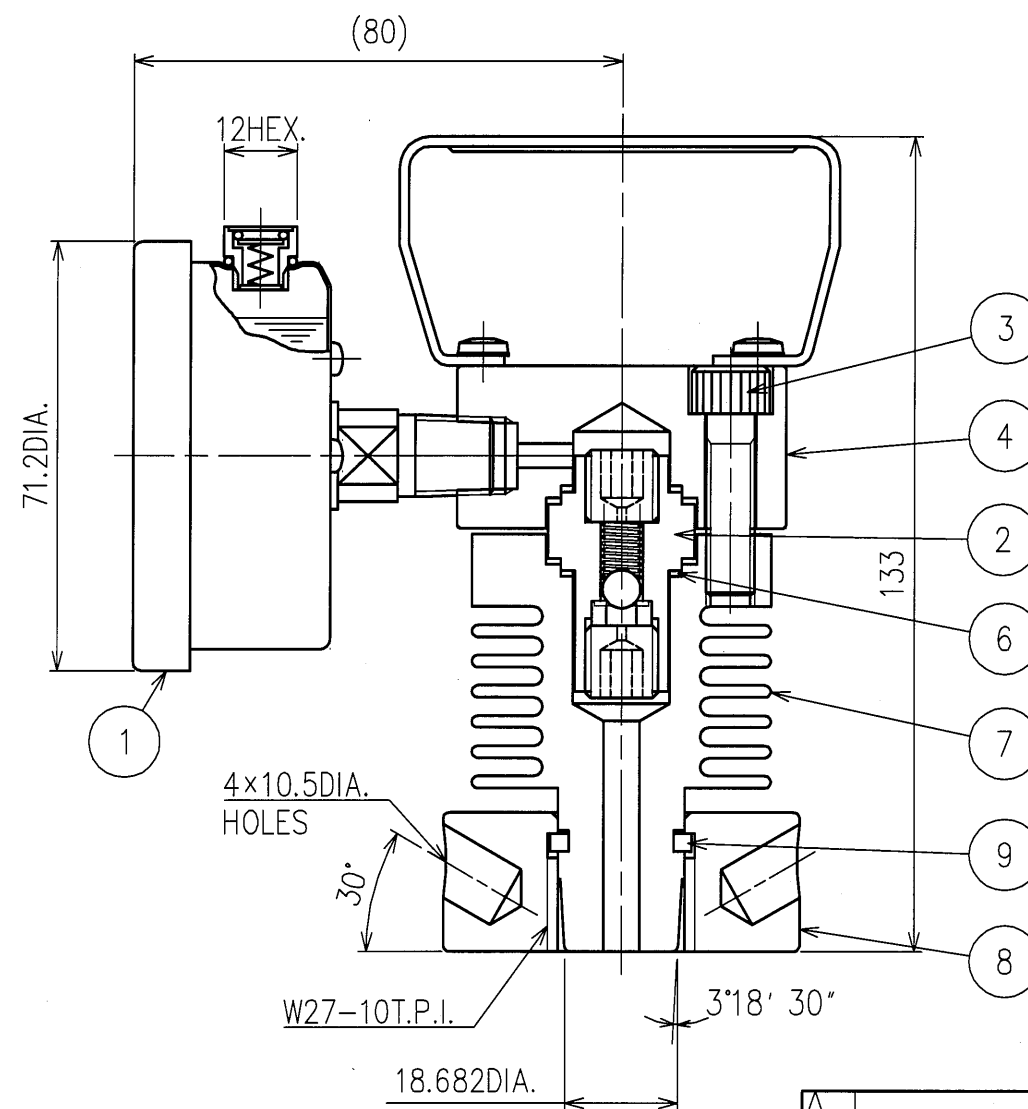
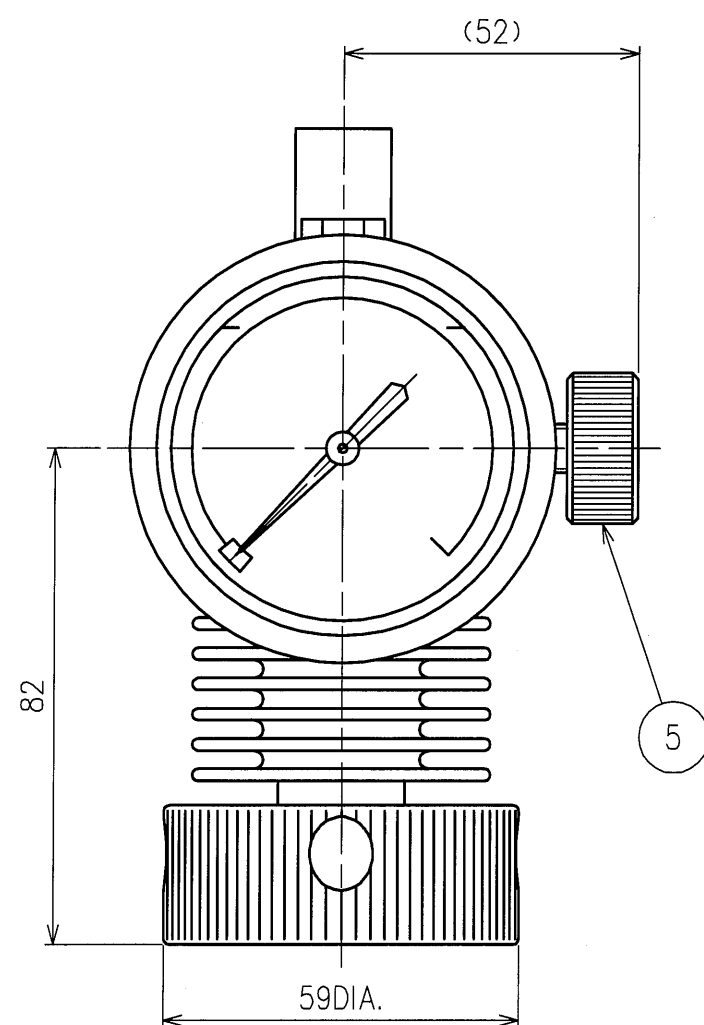


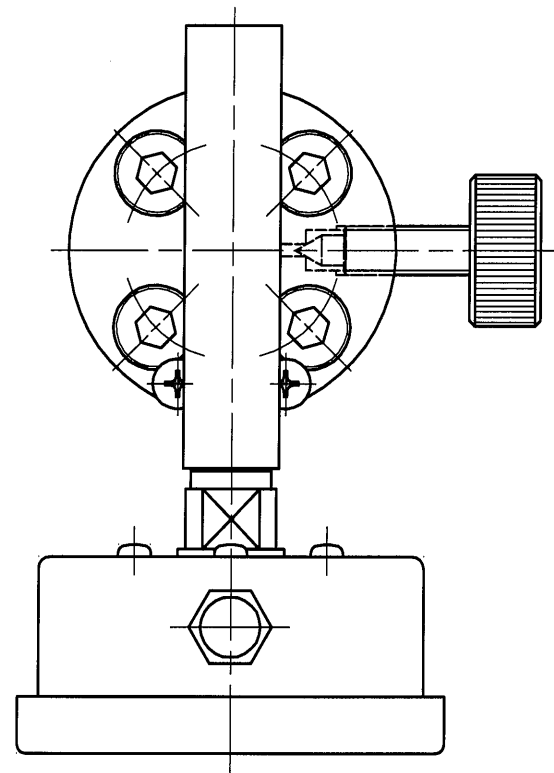

No.	NAME	SPECIFICATION & MATERIAL	
1	PRESSURE GAUGE	ACCURACY	±1.5%F.S.(ZERO POINT ±2%F.S.)
		PAINTED	ST.ST. NATURE
		CONNECTION	R1/4
		ELEMENT	ST.ST.
		SOCKET	BRASS
		OIL	SILICONE OIL KF96-350
2	CHECK VALVE A'SSY	VALVE CASE	BRASS
		BALL	CERAMIC
		VALVE SEAT	TFE. CARBON
		SPRING	ST.ST.
		HOLD SCREW	ST.ST.
3	BOLTS	STEEL	
4	FLANGE	BRASS	
5	EXHAUST VALVE	ST.ST. & BRASS	
6	PACKINGS	COPPER	
7	BODY	BRASS	
8	UNION NUT	STEEL	
9	RING STOPPER	BRASS	
SPARE PARTS AND ACCESSORY		CHECK VALVE A'SSY:1SET, PACKINGS:2PCS	
		SILICONE OIL:20cc	
		BAR SPANNER:1PC, HEX. BAR SPANNER:1PC	
HOUSING BOX		METAL PRODUCTION	
PROOF TEST PRESS.		NITROGEN GAS	
		PRESS. RANGE	0~25MPa
		TEST PRESS.	11~14MPa

APPD.	T. Sohma	SCALE	FREE	TITLE	MAX. PRESS. INDICATOR	SHEET NO.
CHKD.	M. Kato					
DRAWN	T. Sohma					
DATE	2014. 9. 12					
REVISION	DATE	DRAWN	APPD.	DATE	2014. 9. 12	
					MT31-250	A-A